



# Industrial Panel PC Operations Manual

## PC1000 Series

Your Industrial Control Solutions Source

[www.maplesystems.com](http://www.maplesystems.com)



**For use with the following:**

- PC1200 Series Panel PC
- PC1300 Series Panel PC

## TABLE OF CONTENTS

<b>TABLE OF CONTENTS .....</b>	<b>2</b>
<b>COPYRIGHT NOTICE .....</b>	<b>3</b>
<b>WARRANTY.....</b>	<b>3</b>
<b>TECHNICAL SUPPORT .....</b>	<b>3</b>
<b>UNPACKING THE UNIT .....</b>	<b>3</b>
<b>SAFETY PRECAUTIONS .....</b>	<b>4</b>
<b>OVERVIEW OF PC1000 SERIES .....</b>	<b>5</b>
<b>PANEL PC MOUNTING OPTIONS .....</b>	<b>6</b>
<b>PANEL MOUNTING .....</b>	<b>6</b>
<b>VESA MOUNTING .....</b>	<b>6</b>
<b>SPECIFICATIONS – PC1200 SERIES .....</b>	<b>7</b>
<b>10.4 ~ 15.6” SCREEN SIZES .....</b>	<b>7</b>
<b>17” ~ 21.5” SCREEN SIZES .....</b>	<b>8</b>
<b>HIGH BRIGHTNESS 10.4~ 15” SCREEN SIZES.....</b>	<b>9</b>
<b>HIGH BRIGHTNESS 17~ 21.5” SCREEN SIZES .....</b>	<b>10</b>
<b>DIMENSIONAL OUTLINES – PC1200 SERIES .....</b>	<b>11</b>
<b>SPECIFICATIONS – PC1300 SERIES .....</b>	<b>18</b>
<b>10.4 ~ 15.6” SCREEN SIZES .....</b>	<b>18</b>
<b>17 ~ 21.5” SCREEN SIZES.....</b>	<b>19</b>
<b>HIGH BRIGHTNESS 10.4 ~ 15” SCREEN SIZES.....</b>	<b>20</b>
<b>HIGH BRIGHTNESS 17~ 21.5” SCREEN SIZES .....</b>	<b>21</b>
<b>DIMENSIONAL OUTLINES – PC1300 SERIES .....</b>	<b>22</b>
<b>I/O PORTS.....</b>	<b>29</b>
<b>BIOS CONFIGURATION OPTIONS.....</b>	<b>31</b>
<b>SETTING COM1 FUNCTION .....</b>	<b>32</b>
<b>AUTOMATICALLY STARTUP WHEN POWER IS APPLIED (PC1300 SERIES) .....</b>	<b>33</b>
<b>OPERATING SYSTEM OPTIONS .....</b>	<b>34</b>
<b>WONDERWARE / AVEVA™ EDGE .....</b>	<b>35</b>

## COPYRIGHT NOTICE

This manual is a publication of Maple Systems, Inc., and is provided for use by its customers only. The contents of the manual are copyrighted by Maple Systems, Inc.; reproduction in whole or in part, for use other than in support of Maple Systems equipment is prohibited without the specific written permission of Maple Systems.

## WARRANTY

Warranty Statements are included with each unit at the time of purchase and are available at [www.maplesystems.com](http://www.maplesystems.com).

## TECHNICAL SUPPORT

This manual is designed to provide the necessary information for trouble-free installation and operation of your Panel PC. However, if you need assistance, please contact Maple Systems:

- Phone: 425-745-3229
- Email: [support@maplesystems.com](mailto:support@maplesystems.com)
- Web: [www.maplesystems.com](http://www.maplesystems.com)

## UNPACKING THE UNIT

Carefully unpack the Panel PC. Check all material in the container against the packing list. Maple Systems will not accept responsibility for shortages against the packing list unless notified within 30 days. The equipment and accessories were inspected and tested by Maple Systems before shipment.








Examine the equipment carefully; if any shipping damage is evident, notify the carrier immediately. Maple Systems is not responsible for claim negotiations with the carrier.

Save the shipping container and packing material in case the equipment needs to be stored, returned to Maple Systems, or transported for any reason.

<b>Packing List</b>
PC1000 Series Panel PC unit
Power Cable (for use with existing DC Power Supply)
M4x5mm VESA Mounting Screws (Set of 4)
Mounting Clips (Quantity Dependent on PC screen size)

## SAFETY PRECAUTIONS

Please observe the following precautions when installing the PC1000 Series. Failure to comply with these restrictions could result in loss of life, serious personal injury, or equipment damage.

	<b>Warning:</b> Disconnect this equipment from any power before cleaning. Do not use liquid or spray detergents for cleaning. Use a damp cloth.
	<b>Warning:</b> Keep this equipment away from humidity.
	<b>Warning:</b> Before applying power the unit make sure the voltage of the power source is within the input voltage rating of the unit.
	<b>Warning:</b> Never open the equipment and do not operate equipment with its heatsink cover removed- there are dangerous high voltages present inside. For safety reasons, the equipment should be opened only by a qualified service technician.
	<p><b>Warning:</b> This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.</p> <p>If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> <li>• Reorient or relocate the receiving antenna</li> <li>• Increase the separation between the equipment and receiver</li> <li>• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li> <li>• Consult the dealer or an experienced radio/TV technician for help</li> </ul>
	<b>Warning:</b> Risk of explosion if the battery is replaced with an incorrect type. Batteries should be recycled where possible. Disposal of used batteries must be in accordance with local environmental regulations.
	<b>Warning:</b> Do not leave this equipment in an uncontrolled environment where the storage temperature is below -30°C (-22°F) or above 80°C (175°F). It may damage the equipment.

## OVERVIEW OF PC1000 SERIES

PC1000 Series Panel PC units are industrial, heavy duty fanless PCs available in two main categories: PC1200 Series and PC1300 Series. Display sizes range from 10.4 ~ 21.5", with select displays offering a high-brightness (**1000 nits**) option. High brightness displays are ideal for use in environments where there is a larger than normal amount of ambient light, allowing for the user to maintain readability of the PC display.

All PC1000 Panel PCs feature Projected Capacitive Touch Screens, which allow for a more natural, intuitive user touch experience compared to traditional analog-resistive touch screen terminals. All PC1000 units feature dual Gigabit Ethernet Ports, allowing for simultaneous connection to multiple networks. Each PC1000 unit comes with Microsoft Windows® 10 IOT LTSC 64-bit pre-installed.

PC1000 Series Panel PCs are NEMA4 rated and carry a rugged IP65 certification (when panel mounted). PC1000 Series units can be factory equipped with Wi-Fi, enabling access to existing 802.11 b/g/n wireless networks.

### PC1200

The PC1200 Series is powered by the Intel® Pentium™ N4200 1.1GHz quad-core processor. Memory options include 4GB or 8GB of DDR3L RAM. Solid State Drive options include sizes from 32GB to 1TB (Other options may be available; contact Maple Systems for details).

PC1200 Series units have 4 x USB 3.0 ports, 2 x USB 2.0 ports, 1 x HDMI, 1 x Line-out, 1 x Mic-in, and 3 x DE-9P serial ports.



*PC1200 Series I/Os (View from Bottom of unit)*

### PC1300

The PC1300 Series units boast a 7<sup>th</sup> Generation Intel® Kaby Lake Core™ i-Series Processors (i3-7100U – 2.4GHz, i5-7300U – 2.6GHz, i7-7600U – 2.8GHz) with up to 32GB of DDR4 RAM. Solid State Drive options include sizes from 64GB to 1TB (Other options may be available; contact Maple Systems for details).

PC1300 Series units have 4 x USB 3.0 ports, 2 x USB 2.0 ports, 1 x HDMI, 1 x DisplayPort, 1 x Line-Out, 1 x Mic-In, and 4 x DE-9P serial ports.




*PC1300 Series I/Os (View from Bottom of unit)*

## PANEL PC MOUNTING OPTIONS

### PANEL MOUNTING

PC1000 units can be panel mounted using the mounting holes located on the rear of the unit. Use the included clamps to fasten the unit to the panel, cut out to the proper dimensions on the datasheet corresponding to your display size. Tighten the bolts no more than **5.1 in./lbs.** to ensure an adequate seal. Over torquing the bolts may possibly negate NEMA or IP65 rating, or cause damage to the unit or panel.

Maple Systems is not responsible for damage to unit, mounting surface or any other components caused by improper mounting.

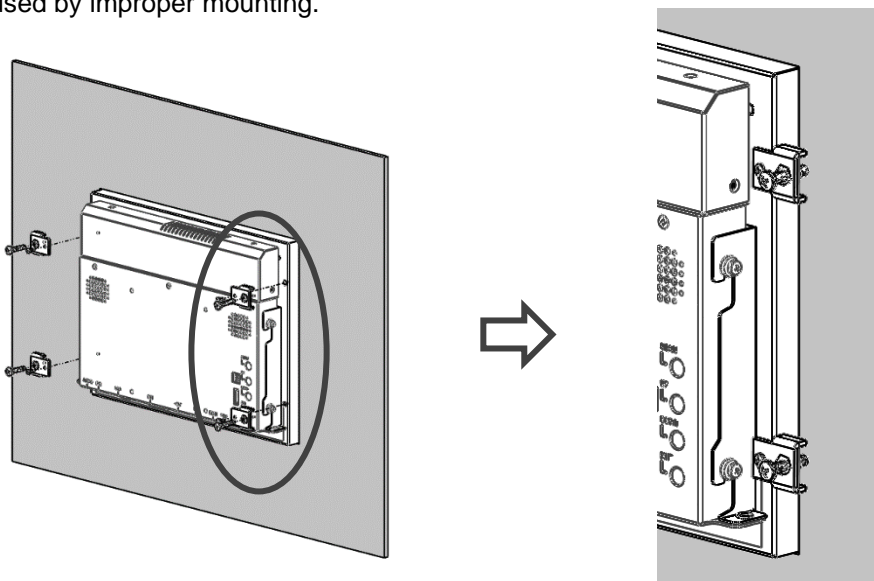


**Note:** 10.4" Monitor Panel Mounting example shown. Actual Product differs from picture.

### VESA MOUNTING

In addition to panel mounting, the PC1000 Series Panel PCs offer VESA 100 mounting as an option. VESA 100 x 100 mm threaded inserts are located on the rear of the unit. Use M4 threaded mounting screws to attach your VESA mounting bracket (not provided by Maple Systems) to the Panel PC.

Your PC comes with M4x5mm mounting screws, but your VESA bracket may require screws of a different length. Use VESA mounting brackets sufficient for the application. Maple Systems is not responsible for damage to unit, mounting surface or any other components caused by improper mounting.

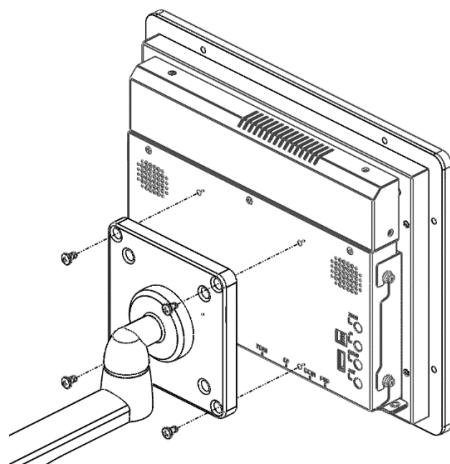

**Note:** VESA Mounting example shown. Actual Product differs from picture. VESA Mount not provided by Maple Systems.

## SPECIFICATIONS – PC1200 SERIES

The following section contains the Specifications and Dimensional Drawings for the PC1200 Series Panel PC Configurations.

### PC1200 SERIES SPECIFICATIONS 10.4 ~ 15.6" SCREEN SIZES

<b>System</b>	<b>CPU</b>	Intel® Pentium™ Apollo Lake™ N4200 Quad-Core™ 1.1GHz CPU			
	<b>System Memory Options</b>	1 x DDR3-L 204-pin SO-DIMM RAM (4, 8 GB)			
<b>I/O Ports</b>	<b>USB</b>	2 x USB 2.0 type A 4 x USB 3.0 type A			
	<b>Serial</b>	1 x RS-232/422/485 DE-9P, COM1 (default RS-232) 2 x RS-232 DE-9P, COM2/COM3			
	<b>Audio</b>	1 x 3.5 mm Line-out			
	<b>LAN</b>	2 x GbE RJ-45			
	<b>Power</b>	DC power input jack, thumbscrew secured.			
	<b>Power Switch</b>	1 x Momentary Pushbutton with Integrated LED			
	<b>External Display Connector</b>	1 x HDMI® 1.4a			
<b>Storage</b>	<b>Solid State Drive Options*</b>	1 x 2.5" SATA 2, MLC (32, 64, 128, 256, 512 GB, 1TB SSD)			
	<b>SD Card Slot</b>	N/A			
<b>Expansion</b>	<b>Expansion Slot</b>	Optional Wi-Fi kit (Wi-Fi card and antenna)			
<b>Touch Screen</b>	<b>Type</b>	Projected Capacitive Touch			
	<b>Interface</b>	USB			
<b>Display</b>	<b>Display Type</b>	<b>10.4" TFT XGA LCD</b>	<b>12.1" TFT XGA LCD</b>	<b>15" TFT XGA LCD</b>	<b>15.6" Widescreen TFT FHD LCD</b>
	<b>Max. Resolution</b>	1024 x 768	1024 x 768	1024 x 768	1920 x 1080
	<b>Max. Color</b>	16.2 M	16.2 M	16.2 M	16.2 M
	<b>Luminance (cd/m<sup>2</sup>)</b>	350	450	300	450
	<b>View Angle (H°/V°)</b>	170/170	170/170	170/160	170/170
	<b>Contrast Ratio</b>	1000:1	700:1	2000:1	500:1
	<b>Backlight Lifetime (hours)</b>	50,000+	50,000+	50,000+	50,000+
<b>Electrical</b>	<b>Input Voltage</b>	12~24 VDC	12~24 VDC	12~24 VDC	12~24 VDC
	<b>Input Current</b>	0.88~1.75 A	0.94~1.89 A	1.0~2.0 A	1.38~2.75 A
	<b>Input Power</b>	21 W	22.5 W	24 W	33 W
<b>Mechanical</b>	<b>Dimension (W x H x D)</b>	11.57 x 8.90 x 2.82" [294 x 226 x 71.6 mm]	12.48 x 9.65 x 2.82" [317 x 245 x 71.6 mm]	13.97 x 11.40 x 2.82" [354.9 x 289.5 x 71.6 mm]	15.75 x 9.84 x 2.56" [400 x 250 x 65 mm]
	<b>Net Weight</b>	6.83 lbs [3.1 kg]	7.28 lbs [3.3 kg]	9.70 lbs [4.4 kg]	9.70 lbs [4.4 kg]
	<b>Panel Cutout Dimensions (W x H)</b>	10.63 x 7.95" [270 x 202 mm]	11.54 x 8.70" [293 x 221 mm]	13.03 x 10.47" [331 x 266 mm]	14.57 x 8.90" [370 x 226 mm]
	<b>Mounting</b>	Panel mounting, VESA 100 x 100			
	<b>Construction</b>	Black Steel Chassis, Aluminum Heatsink			
	<b>Rating</b>	IP65 compliant front panel, NEMA 4 when panel mounted			
<b>Environmental</b>	<b>Operating Temperature</b>	32~140°F [0~60°C]			
	<b>Storage Temperature</b>	-22~175°F [-30~80°C]			
	<b>Storage Humidity</b>	10 to 90% @ 40°C, non-condensing			
	<b>Certifications</b>	CE / FCC Class B / RoHS			
<b>Operating System</b>	<b>Microsoft Windows Options</b>	Microsoft Windows® 10 IoT Enterprise Embedded LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise LTSC 64-bit (PKEA)			
<b>Notes</b>	* Additional SSD options available; contact Maple Systems for details  Specifications subject to change without notice				

## PC1200 SERIES SPECIFICATIONS

### 17" ~ 21.5" SCREEN SIZES

<b>System</b>	<b>CPU</b>	Intel® Pentium™ Apollo Lake™ N4200 Quad-Core™ 1.1GHz CPU		
	<b>System Memory Options</b>	1 x DDR3-L 204-pin SO-DIMM RAM (4, 8 GB)		
<b>I/O Ports</b>	<b>USB</b>	2 x USB 2.0 type A 4 x USB 3.0 type A		
	<b>Serial</b>	1 x RS-232/422/485 DE-9P, COM1 (default RS-232) 2 x RS-232 DE-9P, COM2/COM3		
	<b>Audio</b>	1 x 3.5 mm Line-out		
	<b>LAN</b>	2 x GbE RJ-45		
	<b>Power</b>	DC power input jack, thumbscrew secured.		
	<b>Power Switch</b>	1 x Momentary Pushbutton with Integrated LED		
	<b>External Display Connector</b>	1 x HDMI® 1.4a		
<b>Storage</b>	<b>Solid State Drive Options*</b>	1 x 2.5" SATA 2, MLC (32, 64, 128, 256, 512 GB, 1TB SSD)		
	<b>SD Card Slot</b>	N/A		
<b>Expansion</b>	<b>Expansion Slot</b>	Optional Wi-Fi kit (Wi-Fi card and antenna)		
<b>Touch Screen</b>	<b>Type</b>	Projected Capacitive Touch		
	<b>Interface</b>	USB		
<b>Display</b>	<b>Display Type</b>	<b>17" TFT SXGA LCD</b>	<b>19" TFT SXGA LCD</b>	<b>21.5" Widescreen TFT FHD LCD</b>
	<b>Max. Resolution</b>	1280 x 1024	1280 x 1024	1920 x 1080
	<b>Max. Color</b>	16.2 M	16.2 M	16.2 M
	<b>Luminance (cd/m<sup>2</sup>)</b>	250	350	250
	<b>View Angle (H°/V°)</b>	160/160	170/160	170/160
	<b>Contrast Ratio</b>	1000:1	1000:1	3000:1
	<b>Backlight Lifetime (hours)</b>	50,000+	30,000+	50,000+
<b>Electrical</b>	<b>Input Voltage</b>	12~24 VDC	12~24 VDC	12~24 VDC
	<b>Input Current</b>	1.15~2.29 A	1.19~2.38 A	1.46~2.92 A
	<b>Input Power</b>	27.5 W	28.5 W	35 W
<b>Mechanical</b>	<b>Dimension (W x H x D)</b>	15.23 x 13.09 x 2.82" [386.9 x 332.5 x 71.6 mm]	17.44 x 14.49 x 2.65" [443 x 368 x 67.3 mm]	20.63 x 13.00 x 2.82" [524 x 330.2 x 71.6 mm]
	<b>Net Weight</b>	10.58 lbs [4.8 kg]	15.65 lbs [7.1 kg]	15.87 lbs [7.2 kg]
	<b>Panel Cutout Dimensions (W x H)</b>	14.29 x 12.17" [363 x 309 mm]	16.69 x 13.82" [424 x 351 mm]	19.69 x 12.09" [500 x 307 mm]
	<b>Mounting</b>	Panel mounting, VESA 100 x 100		
	<b>Construction</b>	Black Steel Chassis, Aluminum Heatsink		
<b>Environmental</b>	<b>Operating Temperature</b>	32~140°F [0~60°C]		
	<b>Storage Temperature</b>	-22~175°F [-30~80°C]		
	<b>Storage Humidity</b>	10 to 90% @ 40°C, non-condensing		
	<b>Certifications</b>	CE / FCC Class B / RoHS		
<b>Operating System</b>	<b>Microsoft Windows Options</b>	Microsoft Windows® 10 IoT Enterprise Embedded LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise LTSC 64-bit (PKEA)		
<b>Notes</b>	* Additional SSD options available; contact Maple Systems for details  Specifications subject to change without notice			



## PC1200 SERIES SPECIFICATIONS HIGH BRIGHTNESS 10.4~ 15" SCREEN SIZES


<b>System</b>	<b>CPU</b>	Intel® Pentium™ Apollo Lake™ N4200 Quad-Core™ 1.1GHz CPU		
	<b>System Memory Options</b>	1 x DDR3-L 204-pin SO-DIMM RAM (4, 8 GB)		
<b>I/O Ports</b>	<b>USB</b>	2 x USB 2.0 type A 4 x USB 3.0 type A		
	<b>Serial</b>	1 x RS-232/422/485 DE-9P, COM1 (default RS-232) 2 x RS-232 DE-9P, COM2/COM3		
	<b>Audio</b>	1 x 3.5 mm Line-out		
	<b>LAN</b>	2 x GbE RJ-45		
	<b>Power</b>	DC power input jack, thumbscrew secured.		
	<b>Power Switch</b>	1 x Momentary Pushbutton with Integrated LED		
	<b>External Display Connector</b>	1 x HDMI® 1.4a		
<b>Storage</b>	<b>Solid State Drive Options*</b>	1 x 2.5" SATA 2, MLC (32, 64, 128, 256, 512 GB, 1TB SSD)		
	<b>SD Card Slot</b>	N/A		
<b>Expansion</b>	<b>Expansion Slot</b>	Optional Wi-Fi kit (Wi-Fi card and antenna)		
<b>Touch Screen</b>	<b>Type</b>	Projected Capacitive Touch		
	<b>Interface</b>	USB		
<b>Display</b>	<b>Display Type</b>	<b>10.4"</b> <b>TFT XGA LCD</b>	<b>12.1"</b> <b>TFT XGA LCD</b>	<b>15"</b> <b>TFT XGA LCD</b>
	<b>Max. Resolution</b>	1024 x 768	1024 x 768	1024 x 768
	<b>Max. Color</b>	16.2 M	16.2 M	16.2 M
	<b>Luminance (cd/m<sup>2</sup>)</b>	<b>1000</b>	<b>1000</b>	<b>1000</b>
	<b>View Angle (H°/V°)</b>	170/170	170/170	170/160
	<b>Contrast Ratio</b>	1000:1	700:1	2000:1
	<b>Backlight Lifetime (hours)</b>	30,000+	30,000+	30,000+
<b>Electrical</b>	<b>Input Voltage</b>	12~24 VDC	12~24 VDC	12~24 VDC
	<b>Input Current</b>	1.06~2.08 A	1.08~2.17 A	1.33~2.67 A
	<b>Input Power</b>	25.5 W	26 W	32 W
<b>Mechanical</b>	<b>Dimension (W x H x D)</b>	11.57 x 8.90 x 2.82" [294 x 226 x 71.6 mm]	12.48 x 9.65 x 2.82" [317 x 245 x 71.6 mm]	13.97 x 11.40 x 2.82" [354.9 x 289.5 x 71.6 mm]
	<b>Net Weight</b>	6.83 lbs [3.1 kg]	9.70 lbs [4.4 kg]	9.70 lbs [4.4 kg]
	<b>Panel Cutout Dimensions (W x H)</b>	10.63 x 7.95" [270 x 202 mm]	11.54 x 8.70" [293 x 221 mm]	13.03 x 10.47" [331 x 266 mm]
	<b>Mounting</b>	Panel mounting, VESA 100 x 100		
	<b>Construction</b>	Black Steel Chassis, Aluminum Heatsink		
	<b>Rating</b>	IP65 compliant front panel, NEMA 4 when panel mounted		
	<b>Environmental</b>	<b>Operating Temperature</b>	32~140°F [0~60°C]	
<b>Storage Temperature</b>		-22~175°F [-30~80°C]		
<b>Storage Humidity</b>		10 to 90% @ 40°C, non-condensing		
<b>Certifications</b>		CE / FCC Class B / RoHS		
<b>Operating System</b>	<b>Microsoft Windows Options</b>	Microsoft Windows® 10 IoT Enterprise Embedded LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise LTSC 64-bit (PKEA)		
<b>Notes</b>	* Additional SSD options available; contact Maple Systems for details			
	Specifications subject to change without notice			

## PC1200 SERIES SPECIFICATIONS HIGH BRIGHTNESS 17~ 21.5" SCREEN SIZES

<b>System</b>	<b>CPU</b>	Intel® Pentium™ Apollo Lake™ N4200 Quad-Core™ 1.1GHz CPU	
	<b>System Memory Options</b>	1 x DDR3-L 204-pin SO-DIMM RAM (4, 8 GB)	
<b>I/O Ports</b>	<b>USB</b>	2 x USB 2.0 type A 4 x USB 3.0 type A	
	<b>Serial</b>	1 x RS-232/422/485 DE-9P, COM1 (default RS-232) 2 x RS-232 DE-9P, COM2/COM3	
	<b>Audio</b>	1 x 3.5 mm Line-out	
	<b>LAN</b>	2 x GbE RJ-45	
	<b>Power</b>	DC power input jack, thumbscrew secured.	
	<b>Power Switch</b>	1 x Momentary Pushbutton with Integrated LED	
	<b>External Display Connector</b>	1 x HDMI® 1.4a	
<b>Storage</b>	<b>Solid State Drive Options*</b>	1 x 2.5" SATA 2, MLC (32, 64, 128, 256, 512 GB, 1TB SSD)	
	<b>SD Card Slot</b>	N/A	
<b>Expansion</b>	<b>Expansion Slot</b>	Optional Wi-Fi kit (Wi-Fi card and antenna)	
<b>Touch Screen</b>	<b>Type</b>	Projected Capacitive Touch	
	<b>Interface</b>	USB	
<b>Display</b>	<b>Display Type</b>	<b>17" TFT SXGA LCD</b>	<b>21.5" Widescreen TFT FHD LCD</b>
	<b>Max. Resolution</b>	1280 x 1024	1920 x 1080
	<b>Max. Color</b>	16.2 M	16.2 M
	<b>Luminance (cd/m<sup>2</sup>)</b>	<b>1000</b>	<b>1000</b>
	<b>View Angle (H°/V°)</b>	160/160	170/160
	<b>Contrast Ratio</b>	1000:1	3000:1
	<b>Backlight Lifetime (hours)</b>	30,000+	30,000+
<b>Electrical</b>	<b>Input Voltage</b>	12~24 VDC	12~24 VDC
	<b>Input Current</b>	1.54~3.08 A	2.17~4.33 A
	<b>Input Power</b>	37 W	52 W
<b>Mechanical</b>	<b>Dimension (W x H x D)</b>	15.23 x 13.09 x 2.82" [386.9 x 332.5 x 71.6 mm]	20.63 x 13.00 x 2.82" [524 x 330.2 x 71.6 mm]
	<b>Net Weight</b>	10.58 lbs [4.8 kg]	15.87 lbs [7.2 kg]
	<b>Panel Cutout Dimensions (W x H)</b>	14.29 x 12.17" [363 x 309 mm]	19.69 x 12.09" [500 x 307 mm]
	<b>Mounting</b>	Panel mounting, VESA 100 x 100	
	<b>Construction</b>	Black Steel Chassis, Aluminum Heatsink	
	<b>Rating</b>	IP65 compliant front panel, NEMA 4 when panel mounted	
	<b>Environmental</b>	<b>Operating Temperature</b>	32~140°F [0~60°C]
<b>Storage Temperature</b>		-22~175°F [-30~80°C]	
<b>Storage Humidity</b>		10 to 90% @ 40°C, non-condensing	
<b>Certifications</b>		CE / FCC Class B / RoHS	
<b>Operating System</b>	<b>Microsoft Windows Options</b>	Microsoft Windows® 10 IoT Enterprise Embedded LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise LTSC 64-bit (PKEA)	
<b>Notes</b>	* Additional SSD options available; contact Maple Systems for details  Specifications subject to change without notice		


## DIMENSIONAL OUTLINES – PC1200 SERIES

### PC1210 DIMENSIONS

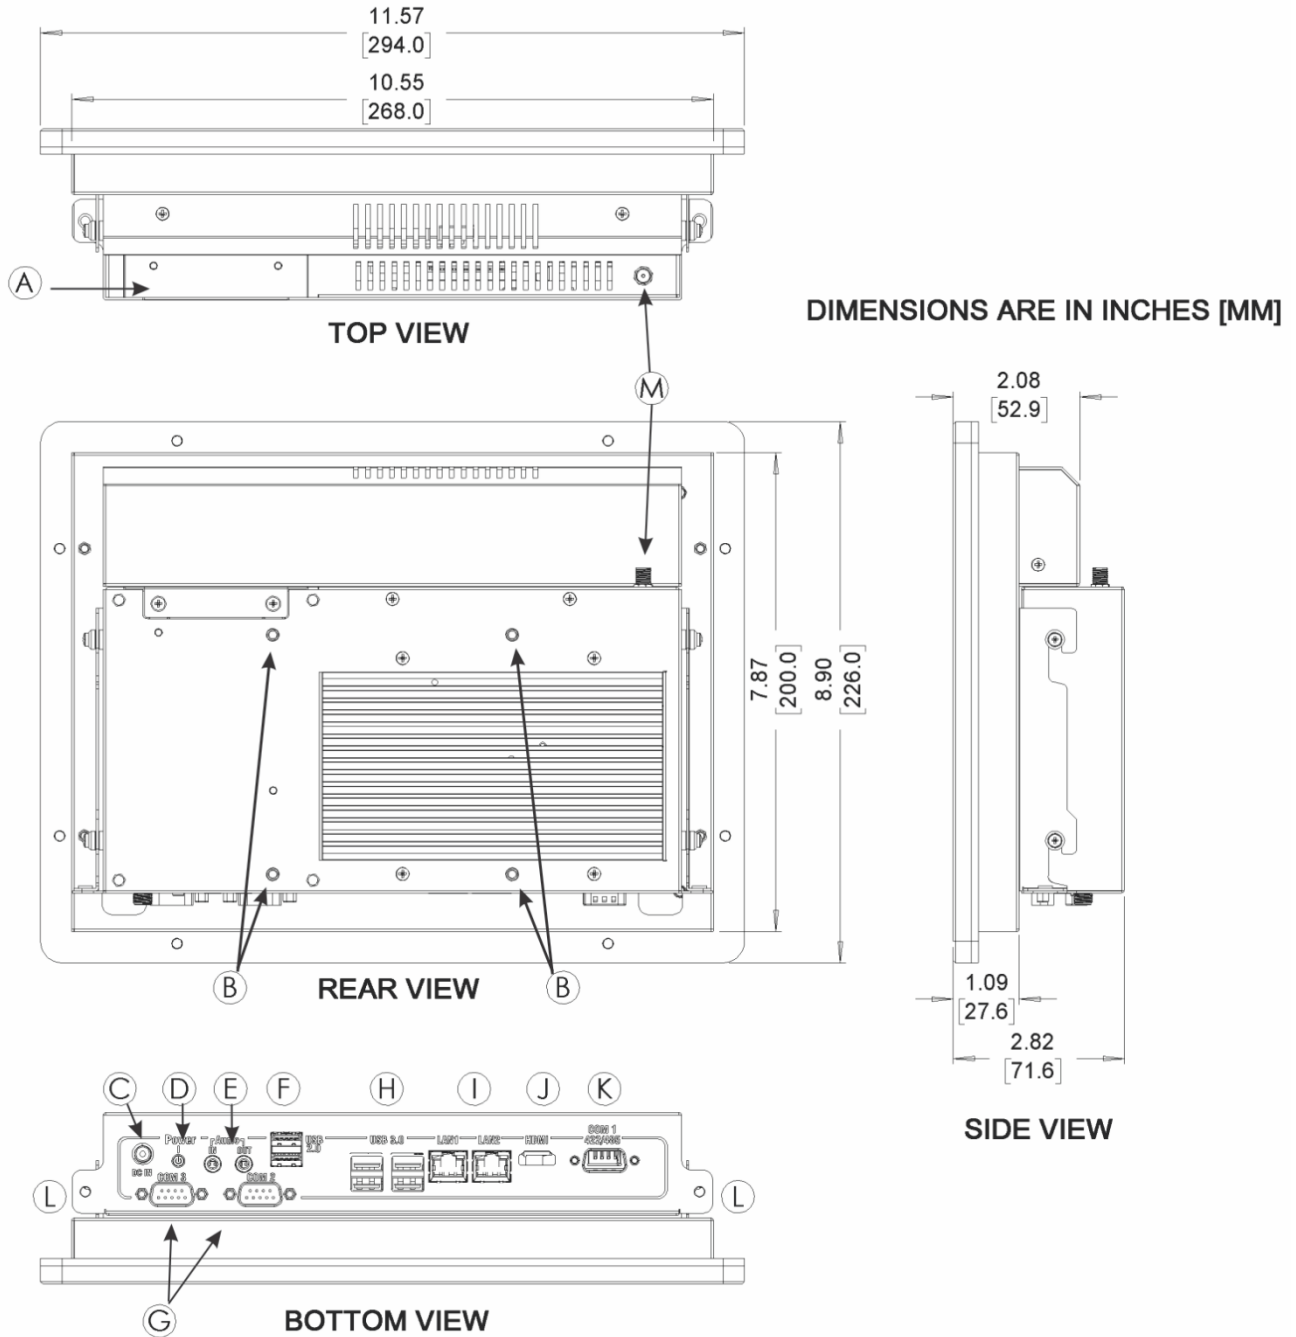


- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> USB 3.0 Host Ports   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> HDMI® Output   |
| <b>D</b> Illuminated Power Button              | <b>K</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> Thumb-Screw Mounting   |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |
| <b>G</b> COM Ports DE9P (RS232)                |   |

**PC1212 DIMENSIONS**

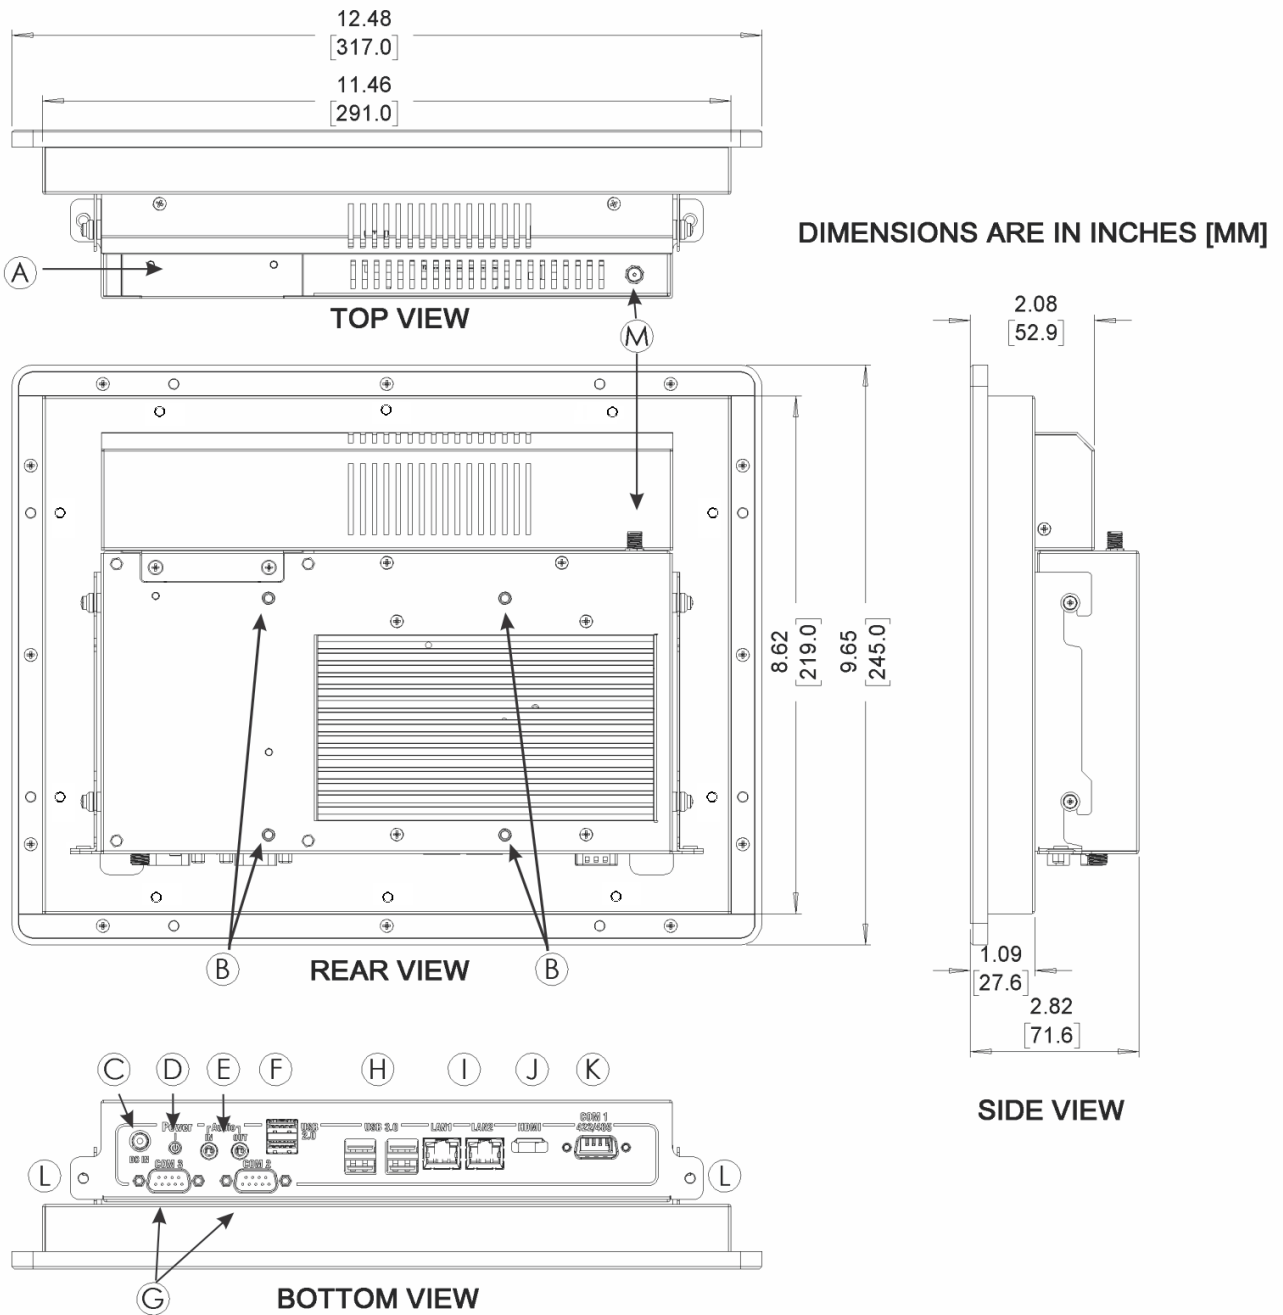


- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> USB 3.0 Host Ports   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> HDMI® Output   |
| <b>D</b> Illuminated Power Button              | <b>K</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> Thumb-Screw Mounting   |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |
| <b>G</b> COM Ports DE9P (RS232)                |   |

**PC1215 DIMENSIONS**


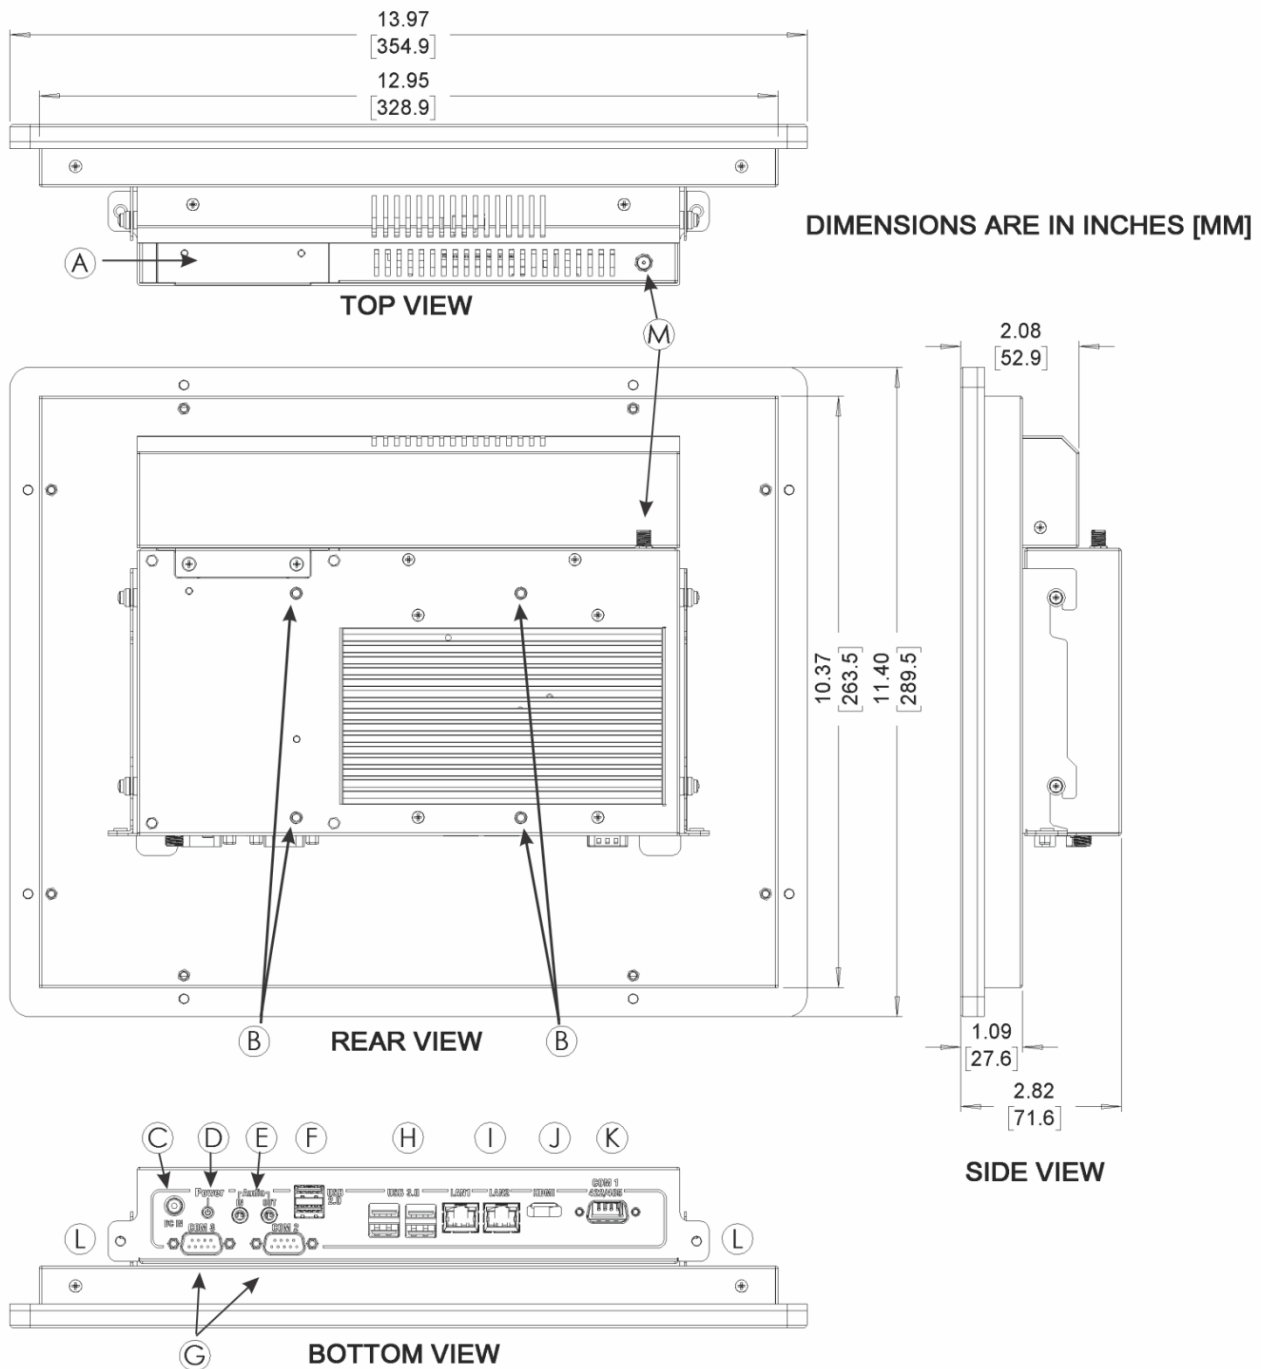


- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> USB 3.0 Host Ports   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> HDMI® Output   |
| <b>D</b> Illuminated Power Button              | <b>K</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> Thumb-Screw Mounting   |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |
| <b>G</b> COM Ports DE9P (RS232)                |   |


**PC1216 DIMENSIONS**

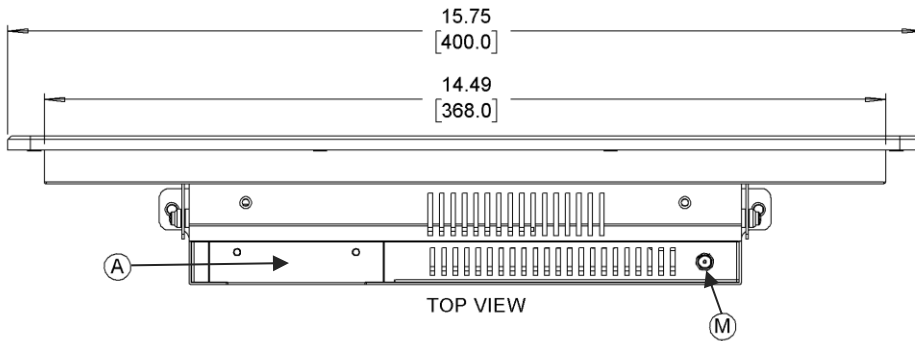

DIMENSIONS ARE IN INCHES [MM]

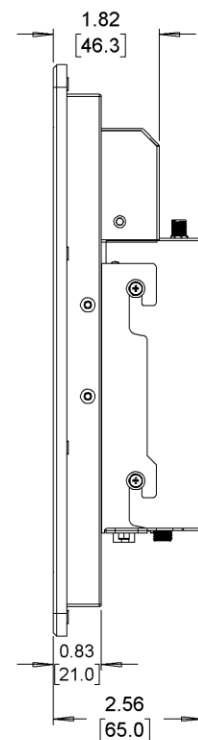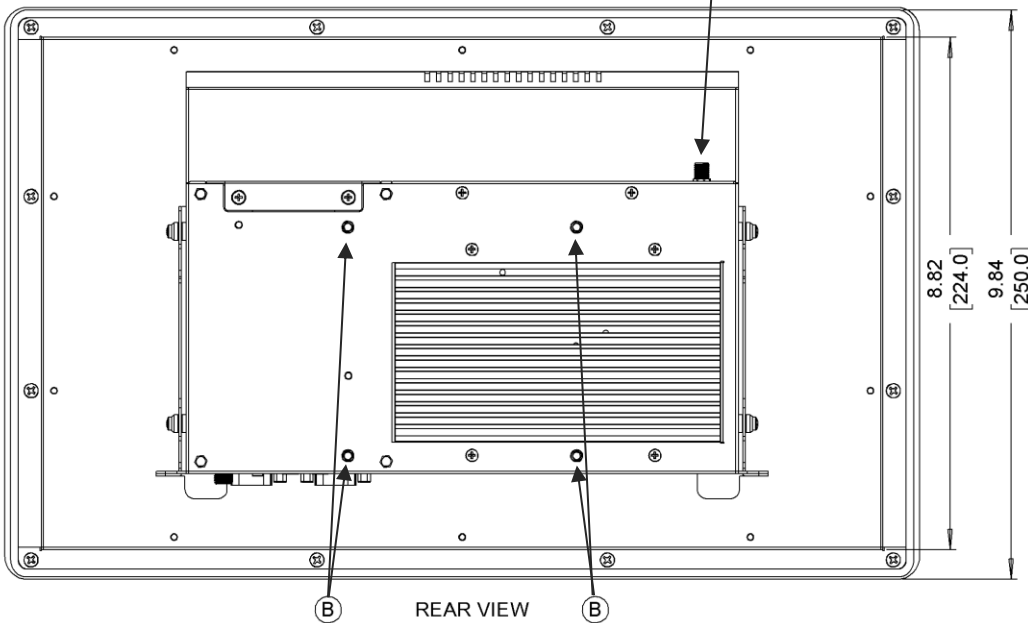


SIDE VIEW

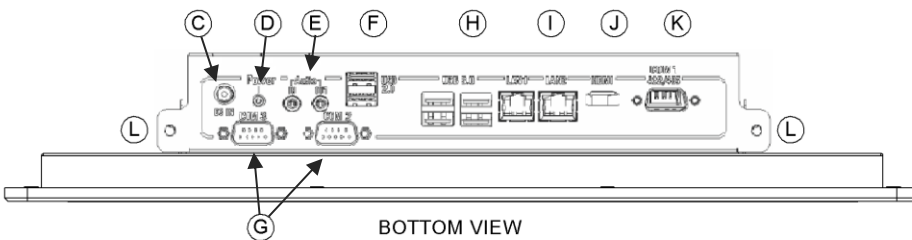


- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> USB 3.0 Host Ports   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> HDMI® Output   |
| <b>D</b> Illuminated Power Button              | <b>K</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> Thumb-Screw Mounting   |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |
| <b>G</b> COM Ports DE9P (RS232)                |   |

**PC1217 DIMENSIONS**

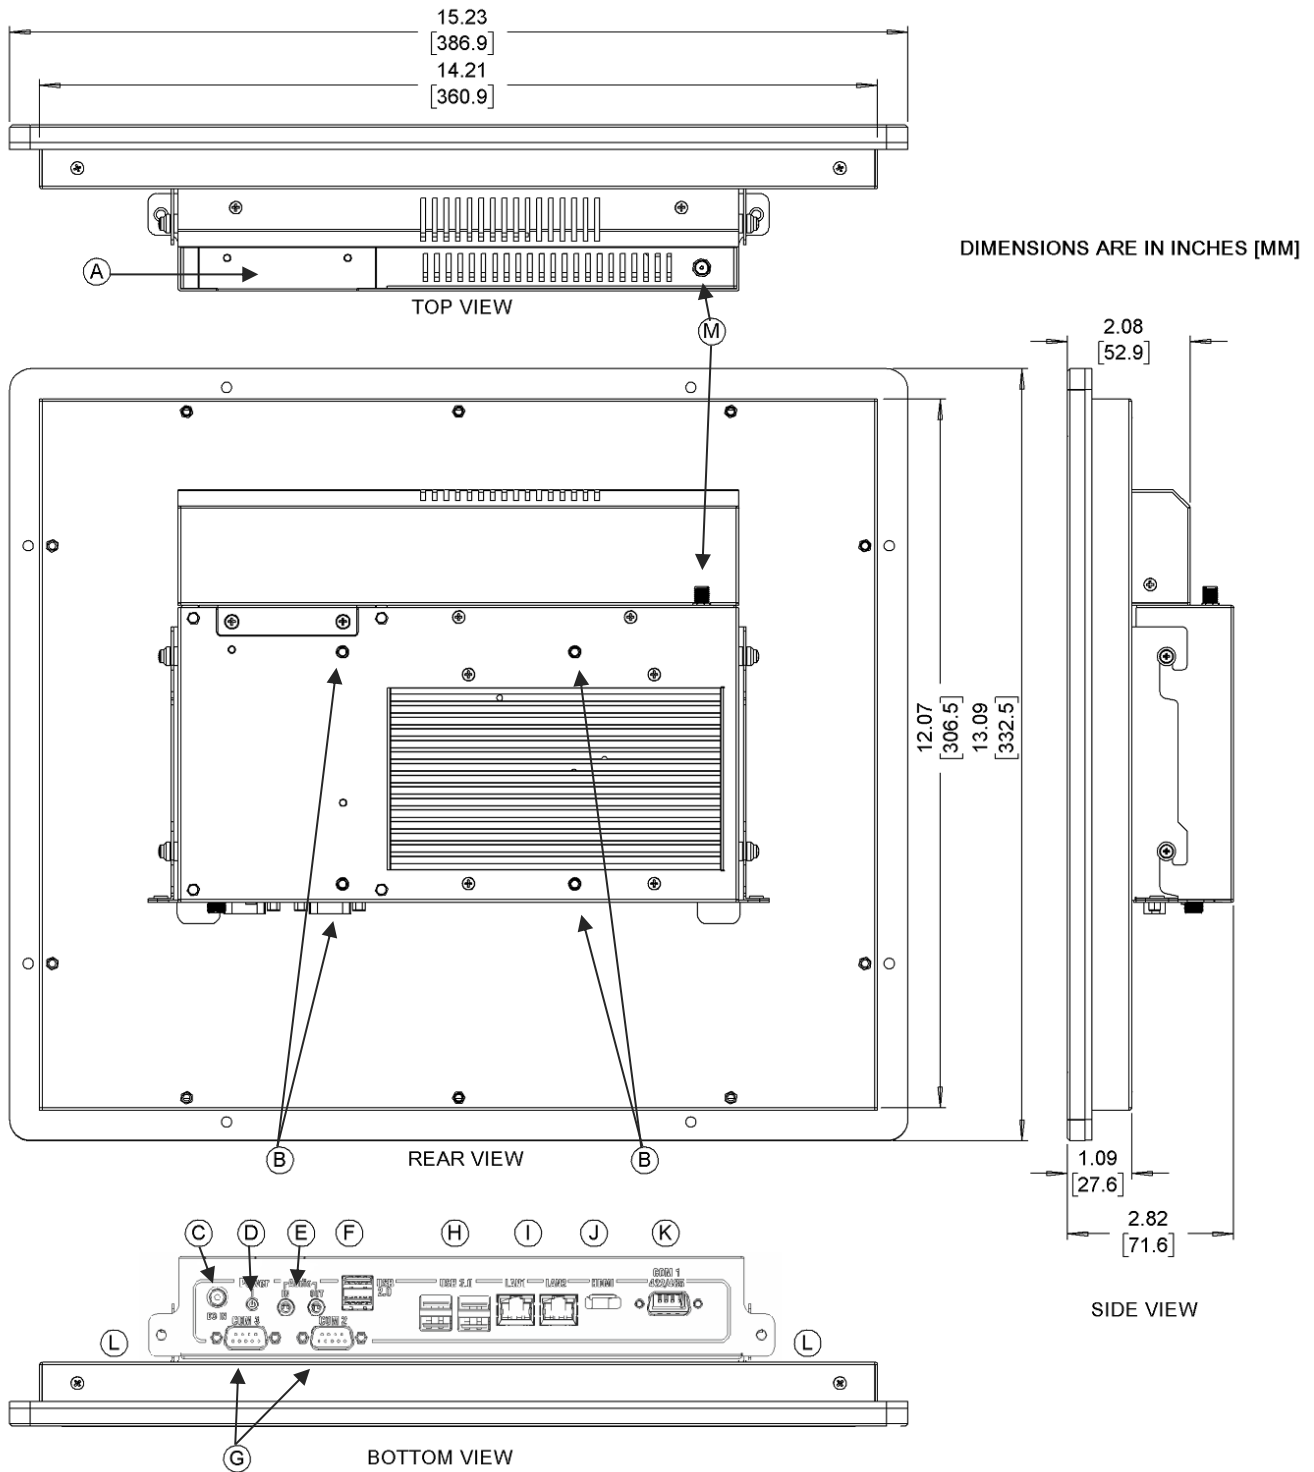

- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> USB 3.0 Host Ports   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> HDMI® Output   |
| <b>D</b> Illuminated Power Button              | <b>K</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> Thumb-Screw Mounting   |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |
| <b>G</b> COM Ports DE9P (RS232)                |   |


**PC1219 DIMENSIONS**

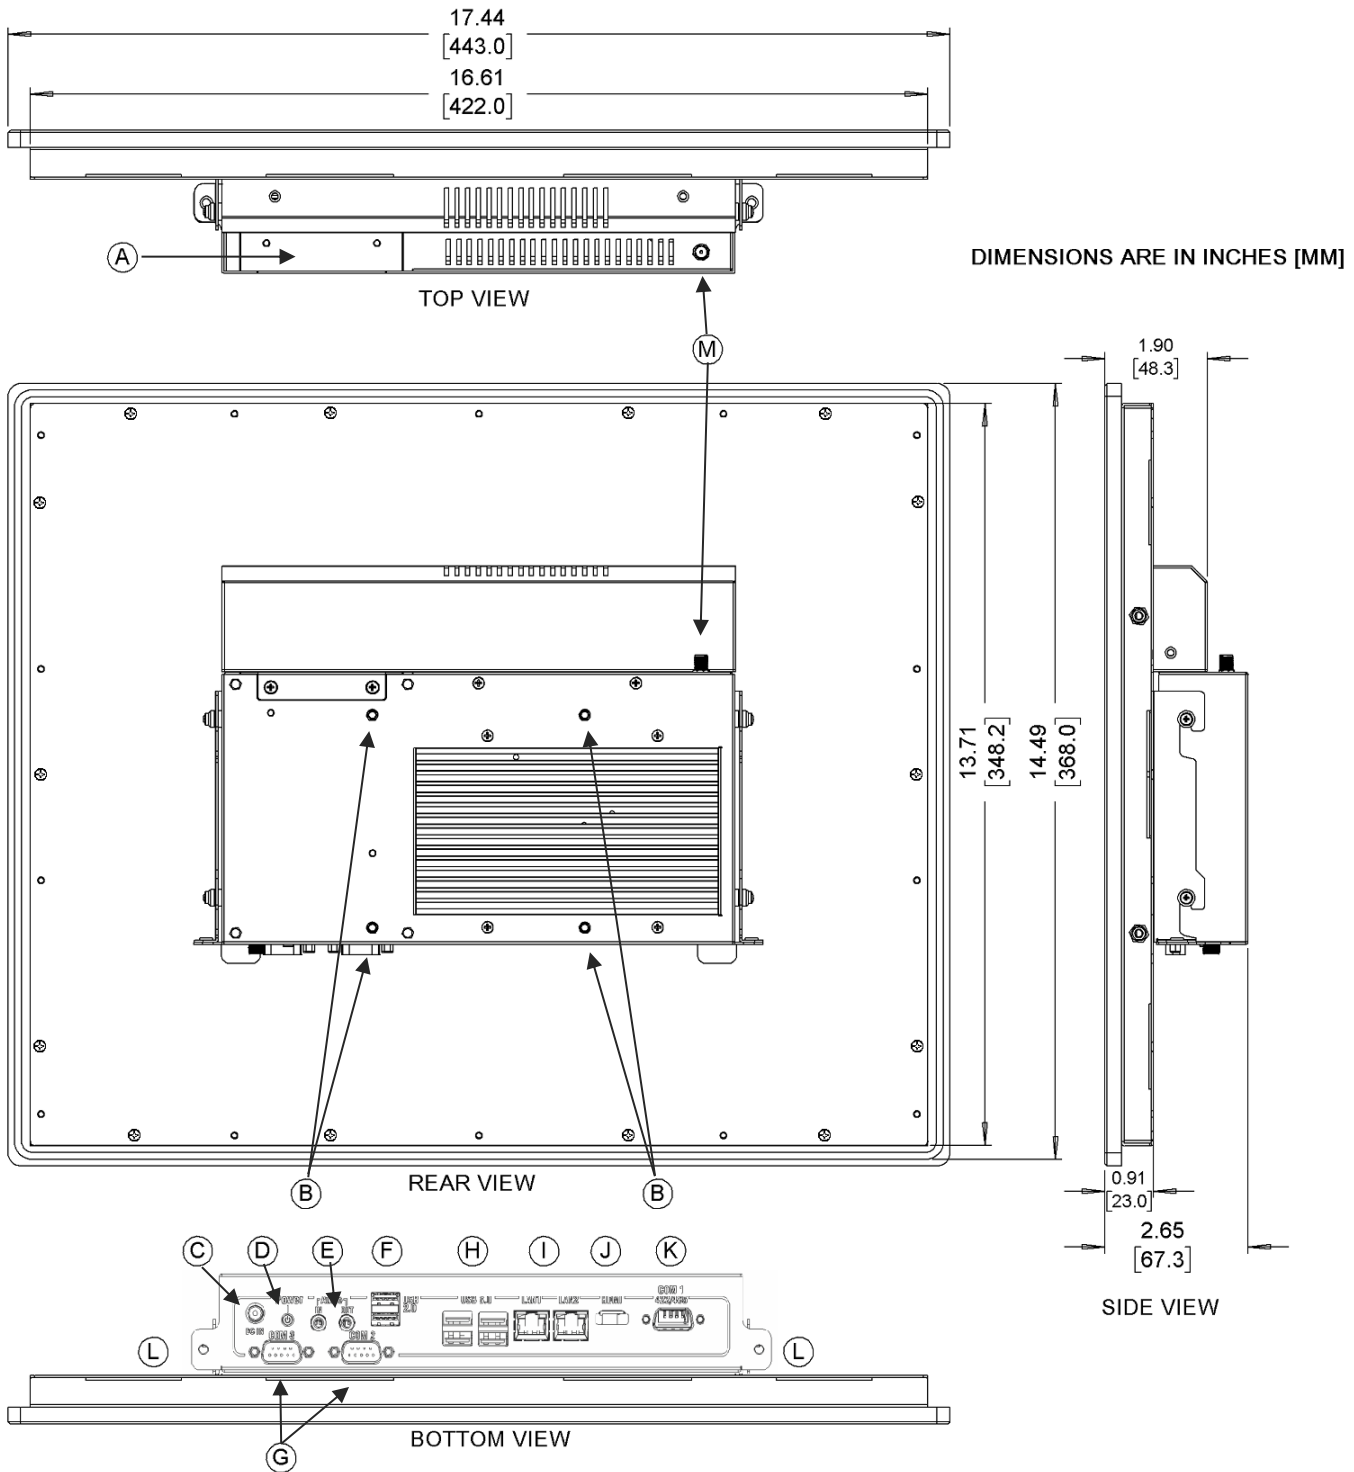

- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> USB 3.0 Host Ports   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> HDMI® Output   |
| <b>D</b> Illuminated Power Button              | <b>K</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> Thumb-Screw Mounting   |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |
| <b>G</b> COM Ports DE9P (RS232)                |   |



**PC1221 DIMENSIONS**

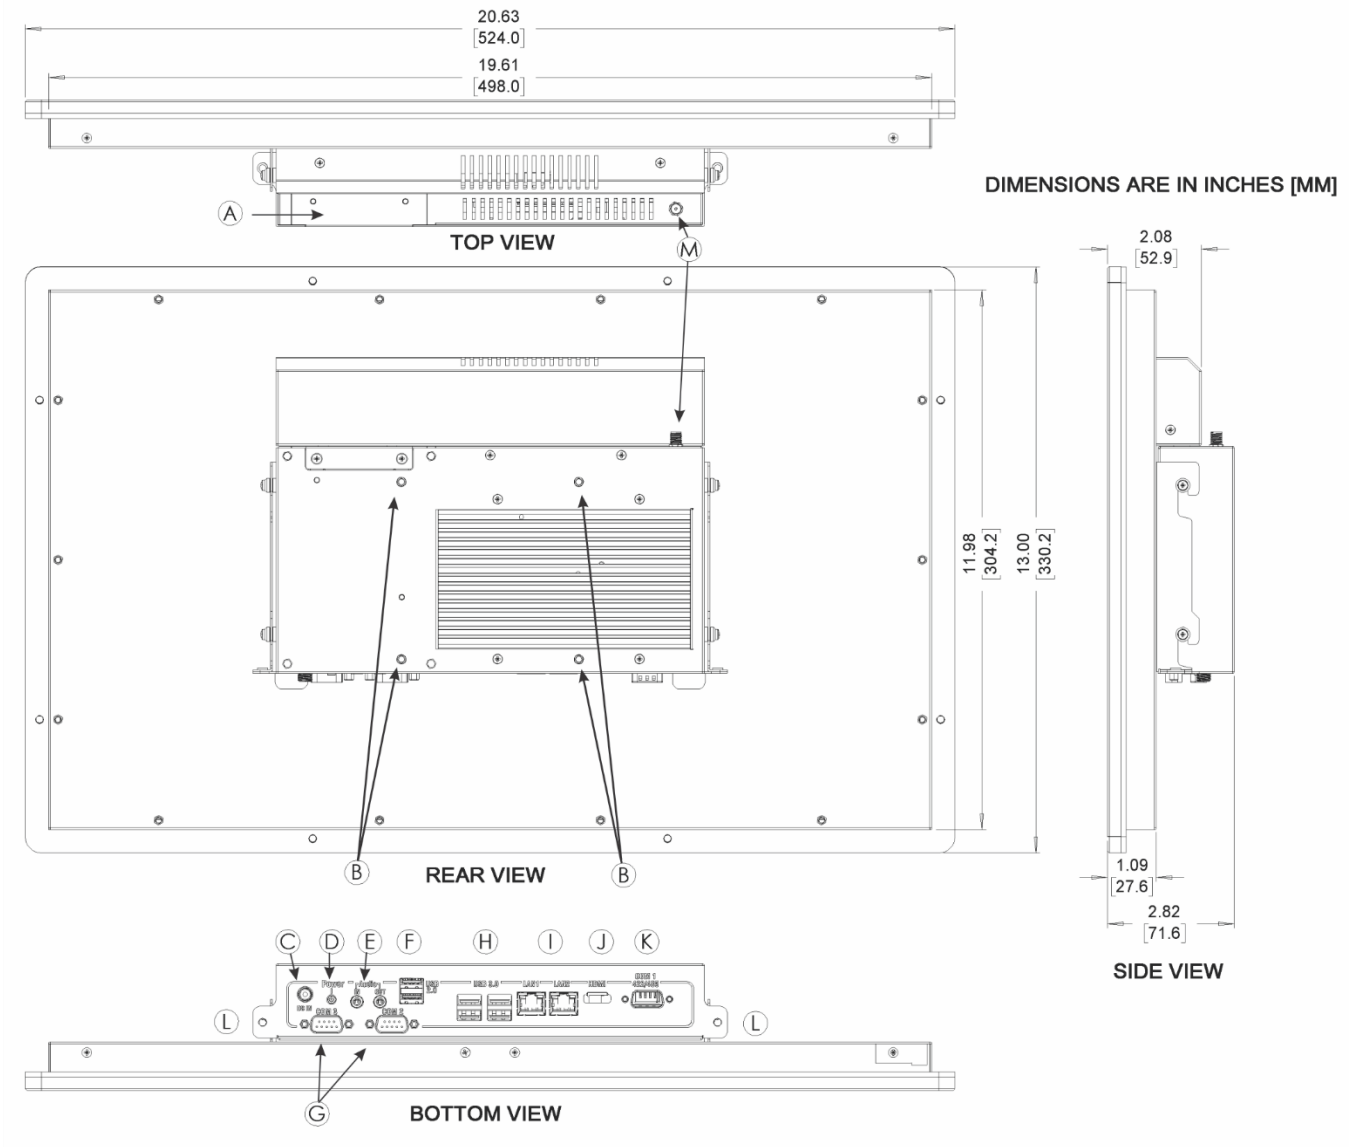

- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> USB 3.0 Host Ports                             |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports                         |
| <b>C</b> DC Input Power Connector              | <b>J</b> HDMI® Output                                   |
| <b>D</b> Illuminated Power Button              | <b>K</b> COM Port DE9P (RS232/RS422/RS485 Configurable) |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> Thumb-Screw Mounting                           |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Wi-Fi Antenna Connector                        |
| <b>G</b> COM Ports DE9P (RS232)                | (Nonfunctional unless Wi-Fi Option Purchased)           |

## SPECIFICATIONS – PC1300 SERIES

The following section contains the Specifications and Dimensional Drawings for the PC1300 Series Panel PC Configurations.

### PC1300 SERIES SPECIFICATIONS 10.4 ~ 15.6" SCREEN SIZES

System	CPU	Intel® 7 <sup>th</sup> Generation Dual Core™ : i3-7100U @ 2.4GHz i5-7300U @ 2.6GHz i7-7600U @ 2.8GHz			
	System Memory Options	2 x DDR4 260-pin SO-DIMM Non-ECC RAM (4, 8, 16, 32 GB)			
I/O Ports	USB	2 x USB 2.0 type A 4 x USB 3.0 type A			
	Serial	1 x RS-232/422/485 DE-9P, COM1 (default RS-232) 3 x RS-232 DE-9P, COM2/COM3/COM4			
	Audio	1 x 3.5 mm Line-out 1 x 3.5 mm Mic-in			
	LAN	2 x GbE RJ-45			
	Power	DC power input jack, thumbscrew secured.			
	Power Switch	1 x Momentary Pushbutton with Integrated LED			
	External Display Connector	1 x DisplayPort 1.2 1 x HDMI® 1.4a			
Storage	Solid State Drive Options*	1 x 2.5" SATA 2, MLC (64, 128, 256, 512 GB, 1TB SSD)			
	SD Card Slot	N/A			
Expansion	Expansion Slot	Optional Wi-Fi kit (Wi-Fi card and antenna)			
Touch Screen	Type	Projected Capacitive Touch			
	Interface	USB			
Display	Display Type	10.4" TFT XGA LCD	12.1" TFT XGA LCD	15" TFT XGA LCD	15.6" Widescreen TFT FHD LCD
	Max. Resolution	1024 X 768	1024 X 768	1024 x 768	1920 x 1080
	Max. Color	16.2 M	16.2 M	16.2 M	16.2 M
	Luminance (cd/m <sup>2</sup> )	350	450	300	450
	View Angle (H°/V°)	170/170	170/170	170/160	170/170
	Contrast Ratio	1000:1	700:1	2000:1	500:1
	Backlight Lifetime (Hours)	50,000+	50,000+	50,000+	50,000+
Electrical	Input Voltage	9~24 VDC	9~24 VDC	9~24 VDC	9~24 VDC
	Input Current	1.66~4.44 A	1.71~4.56 A	1.79~ 4.78 A	1.63~4.33 A
	Input Power	40W	41 W	43 W	39 W
Mechanical	Dimension (W x H x D)	11.57 x 8.90 x 3.62" [294 x 226 x 92 mm]	12.48 x 9.65 x 3.62" [317 x 245 x 92 mm]	13.97 x 11.40 x 3.62" [354.9 x 289.5 x 92 mm]	15.75 x 9.84 x 3.36" [400 x 250 x 85.4 mm]
	Net Weight	8.38 lbs [3.8 kg]	9.04 lbs [4.1 kg]	11.46 lbs [5.2 kg]	11.46 lbs [5.2 kg]
	Panel Cutout Dimensions (W x H)	10.63 x 7.95" [270 x 202 mm]	11.54 x 8.70" [293 x 221 mm]	13.03 x 10.47" [331 x 266 mm]	14.57 x 8.90" [370 x 226 mm]
	Mounting	Panel mounting, VESA 100 x 100			
	Construction	Black Steel Chassis, Aluminum Heatsink			
	Rating	IP65 compliant front panel, NEMA 4 when panel mounted			
Environmental	Operating Temperature	32~140°F [0~60°C]			
	Storage Temperature	-22~175°F [-30~80°C]			
	Storage Humidity	10 to 90% @ 40°C, non-condensing			
	Certifications	CE / FCC Class B / RoHS			
Operating System	Microsoft Windows Options	Microsoft Windows® 10 IoT Enterprise Embedded LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise LTSC 64-bit (PKEA) Microsoft Windows® 11 IoT Enterprise Embedded GAC 64-bit (EPKEA) Microsoft Windows® 11 IoT Enterprise GAC 64-bit (PKEA) Microsoft Windows® 11 Professional			
	Linux Options	Linux® Ubuntu Desktop 22.04			
Notes	* Additional SSD options available; contact Maple Systems for details Specifications subject to change without notice.				

## PC1300 SERIES SPECIFICATIONS

### 17 ~ 21.5" SCREEN SIZES

System	CPU	Intel® 7 <sup>th</sup> Generation Dual Core™ : i3-7100U @ 2.4GHz i5-7300U @ 2.6GHz i7-7600U @ 2.8GHz		
	System Memory Options	2 x DDR4 260-pin SO-DIMM Non-ECC RAM (4, 8, 16, 32 GB)		
I/O Ports	USB	2 x USB 2.0 type A 4 x USB 3.0 type A		
	Serial	1 x RS-232/422/485 DE-9P, COM1 (default RS-232) 3 x RS-232 DE-9P, COM2/COM3/COM4		
	Audio	1 x 3.5 mm Line-out 1 x 3.5 mm Mic-in		
	LAN	2 x GbE RJ-45		
	Power	DC power input jack, thumbscrew secured.		
	Power Switch	1 x Momentary Pushbutton with Integrated LED		
	External Display Connector	1 x DisplayPort 1.2 1 x HDMI® 1.4a		
Storage	Solid State Drive Options*	1 x 2.5" SATA 2, MLC (64, 128, 256, 512 GB, 1TB SSD)		
	SD Card Slot	N/A		
Expansion	Expansion Slot	Optional Wi-Fi kit (Wi-Fi card and antenna)		
Touch Screen	Type	Projected Capacitive Touch		
	Interface	USB		
Display	Display Type	17" TFT SXGA LCD	19" TFT SXGA LCD	21.5" Widescreen TFT FHD LCD
	Max. Resolution	1280 x 1024	1280 x 1024	1920 x 1080
	Max. Color	16.2 M	16.2 M	16.2 M
	Luminance (cd/m <sup>2</sup> )	250	350	250
	View Angle (H°/V°)	160/160	170/160	170/160
	Contrast Ratio	1000:1	1000:1	3000:1
	Backlight Lifetime (Hours)	50,000+	30,000+	50,000+
Electrical	Input Voltage	9~24 VDC	9~24 VDC	9~24 VDC
	Input Current	1.92~5.11 A	1.98~5.28 A	2.13~ 5.67 A
	Input Power	46 W	47.5 W	51 W
Mechanical	Dimension (W x H x D)	15.23 x 13.09 x 3.62" [386.9 x 332.5 x 92 mm]	17.44 x 14.49 x 3.44" [443 x 368 x 87.4 mm]	20.63 x 13.00 x 3.62" [524 x 330.2 x 92 mm]
	Net Weight	13.67 lbs [6.2 kg]	18.52 lbs [8.4 kg]	18.74 lbs [8.5 kg]
	Panel Cutout Dimensions (W x H)	14.29 x 12.17" [363 x 309 mm]	16.69 x 13.82" [424 x 351 mm]	19.69 x 12.09" [500 x 307 mm]
	Mounting	Panel mounting, VESA 100 x 100		
	Construction	Black Steel Chassis, Aluminum Heatsink		
Environmental	Rating	IP65 compliant front panel, NEMA 4 when panel mounted		
	Operating Temperature	32~140°F [0~60°C]		
	Storage Temperature	-22~175°F [-30~80°C]		
	Storage Humidity	10 to 90% @ 40°C, non-condensing		
Operating System	Certifications	CE / FCC Class B / RoHS		
	Microsoft Windows Options	Microsoft Windows® 10 IoT Enterprise Embedded LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise LTSC 64-bit (PKEA) Microsoft Windows® 11 IoT Enterprise Embedded GAC 64-bit (EPKEA) Microsoft Windows® 11 IoT Enterprise GAC 64-bit (PKEA) Microsoft Windows® 11 Professional		
	Linux Options	Linux® Ubuntu Desktop 22.04		
Notes	* Additional SSD options available; contact Maple Systems for details  Specifications subject to change without notice.			

## PC1300 SERIES SPECIFICATIONS

### HIGH BRIGHTNESS 10.4 ~ 15" SCREEN SIZES


System	CPU	Intel® 7 <sup>th</sup> Generation Dual Core™ : i3-7100U @ 2.4GHz i5-7300U @ 2.6GHz i7-7600U @ 2.8GHz		
	System Memory Options	2 x DDR4 260-pin SO-DIMM Non-ECC RAM (4, 8, 16, 32 GB)		
I/O Ports	USB	2 x USB 2.0 type A 4 x USB 3.0 type A		
	Serial	1 x RS-232/422/485 DE-9P, COM1 (default RS-232) 3 x RS-232 DE-9P, COM2/COM3/COM4		
	Audio	1 x 3.5 mm Line-out 1 x 3.5 mm Mic-in		
	LAN	2 x GbE RJ-45		
	Power	DC power input jack, thumbscrew secured.		
	Power Switch	1 x Momentary Pushbutton with Integrated LED		
	External Display Connector	1 x DisplayPort 1.2 1 x HDMI® 1.4a		
Storage	Solid State Drive Options*	1 x 2.5" SATA 2, MLC (64, 128, 256, 512 GB, 1TB SSD)		
	SD Card Slot	N/A		
Expansion	Expansion Slot	Optional Wi-Fi kit (Wi-Fi card and antenna)		
Touch Screen	Type	Projected Capacitive Touch		
	Interface	USB		
Display	Display Type	10.4" TFT XGA LCD	12.1" TFT XGA LCD	15" TFT XGA LCD
	Max. Resolution	1024 X 768	1024 X 768	1024 x 768
	Max. Color	16.2 M	16.2 M	16.2 M
	Luminance (cd/m <sup>2</sup> )	1000	1000	1000
	View Angle (H°/V°)	170/170	170/170	170/160
	Contrast Ratio	1000:1	700:1	2000:1
	Backlight Lifetime (Hours)	30,000+	30,000+	30,000+
Electrical	Input Voltage	9~24 VDC	9~24 VDC	9~24 VDC
	Input Current	1.83~4.9 A	1.85~4.94 A	2.08~5.56 A
	Input Power	44 W	44.5 W	50 W
Mechanical	Dimension (W x H x D)	11.57 x 8.90 x 3.62" [294 x 226 x 92 mm]	12.48 x 9.65 x 3.62" [317 x 245 x 92 mm]	13.97 x 11.40 x 3.62" [354.9 x 289.5 x 92 mm]
	Net Weight	8.38 lbs [3.8 kg]	9.04 lbs [4.1 kg]	11.46 lbs [5.2 kg]
	Panel Cutout Dimensions (W x H)	10.63 x 7.95" [270 x 202 mm]	11.54 x 8.70" [293 x 221 mm]	13.03 x 10.47" [331 x 266 mm]
	Mounting	Panel mounting, VESA 100 x 100		
	Construction	Black Steel Chassis, Aluminum Heatsink		
	Rating	IP65 compliant front panel, NEMA 4 when panel mounted		
	Environmental	Operating Temperature	32~140°F [0~60°C]	
Storage Temperature		-22~175°F [-30~80°C]		
Storage Humidity		10 to 90% @ 40°C, non-condensing		
Certifications		CE / FCC Class B / RoHS		
Operating System	Microsoft Windows Options	Microsoft Windows® 10 IoT Enterprise Embedded LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise LTSC 64-bit (PKEA) Microsoft Windows® 11 IoT Enterprise Embedded GAC 64-bit (EPKEA) Microsoft Windows® 11 IoT Enterprise GAC 64-bit (PKEA) Microsoft Windows® 11 Professional		
	Linux Options	Linux® Ubuntu Desktop 22.04		
Notes	* Additional SSD options available; contact Maple Systems for details  Specifications subject to change without notice.			

## PC1300 SERIES SPECIFICATIONS HIGH BRIGHTNESS 17~ 21.5" SCREEN SIZES

System	CPU	Intel® 7 <sup>th</sup> Generation Dual Core™ : i3-7100U @ 2.4GHz i5-7300U @ 2.6GHz i7-7600U @ 2.8GHz	
	System Memory Options	2 x DDR4 260-pin SO-DIMM Non-ECC RAM (4, 8, 16, 32 GB)	
I/O Ports	USB	2 x USB 2.0 type A 4 x USB 3.0 type A	
	Serial	1 x RS-232/422/485 DE-9P, COM1 (default RS-232) 3 x RS-232 DE-9P, COM2/COM3/COM4	
	Audio	1 x 3.5 mm Line-out 1 x 3.5 mm Mic-in	
	LAN	2 x GbE RJ-45	
	Power	DC power input jack, thumbscrew secured.	
	Power Switch	1 x Momentary Pushbutton with Integrated LED	
	External Display Connector	1 x DisplayPort 1.2 1 x HDMI® 1.4a	
Storage	Solid State Drive Options*	1 x 2.5" SATA 2, MLC (64, 128, 256, 512 GB, 1TB SSD)	
	SD Card Slot	N/A	
Expansion	Expansion Slot	Optional Wi-Fi kit (Wi-Fi card and antenna)	
Touch Screen	Type	Projected Capacitive Touch	
	Interface	USB	
Display	Display Type	17" TFT SXGA LCD	21.5" Widescreen TFT FHD LCD
	Max. Resolution	1280 x 1024	1920 x 1080
	Max. Color	16.2 M	16.2 M
	Luminance (cd/m <sup>2</sup> )	1000	1000
	View Angle (H°/V°)	160/160	170/160
	Contrast Ratio	1000:1	3000:1
	Backlight Lifetime (Hours)	30,000+	30,000+
Electrical	Input Voltage	9~24 VDC	9~24 VDC
	Input Current	2.29~6.11 A	2.94~7.83 A
	Input Power	55 W	70.5 W
Mechanical	Dimension (W x H x D)	15.23 x 13.09 x 3.62" [386.9 x 332.5 x 92 mm]	20.63 x 13.00 x 3.62" [524 x 330.2 x 92 mm]
	Net Weight	13.67 lbs [6.2 kg]	18.74 lbs [8.5 kg]
	Panel Cutout Dimensions (W x H)	14.29 x 12.17" [363 x 309 mm]	19.69 x 12.09" [500 x 307 mm]
	Mounting	Panel mounting, VESA 100 x 100	
	Construction	Black Steel Chassis, Aluminum Heatsink	
	Rating	IP65 compliant front panel, NEMA 4 when panel mounted	
Environmental	Operating Temperature	32~140°F [0~60°C]	
	Storage Temperature	-22~175°F [-30~80°C]	
	Storage Humidity	10 to 90% @ 40°C, non-condensing	
Operating System	Certifications	CE / FCC Class B / RoHS	
	Microsoft Windows Options	Microsoft Windows® 10 IoT Enterprise Embedded LTSC 64-bit (EPKEA) Microsoft Windows® 10 IoT Enterprise LTSC 64-bit (PKEA) Microsoft Windows® 11 IoT Enterprise Embedded GAC 64-bit (EPKEA) Microsoft Windows® 11 IoT Enterprise GAC 64-bit (PKEA) Microsoft Windows® 11 Professional	
	Linux Options	Linux® Ubuntu Desktop 22.04	
Notes	* Additional SSD options available; contact Maple Systems for details  Specifications subject to change without notice.		


# DIMENSIONAL OUTLINES – PC1300 SERIES

## PC1310 DIMENSIONS

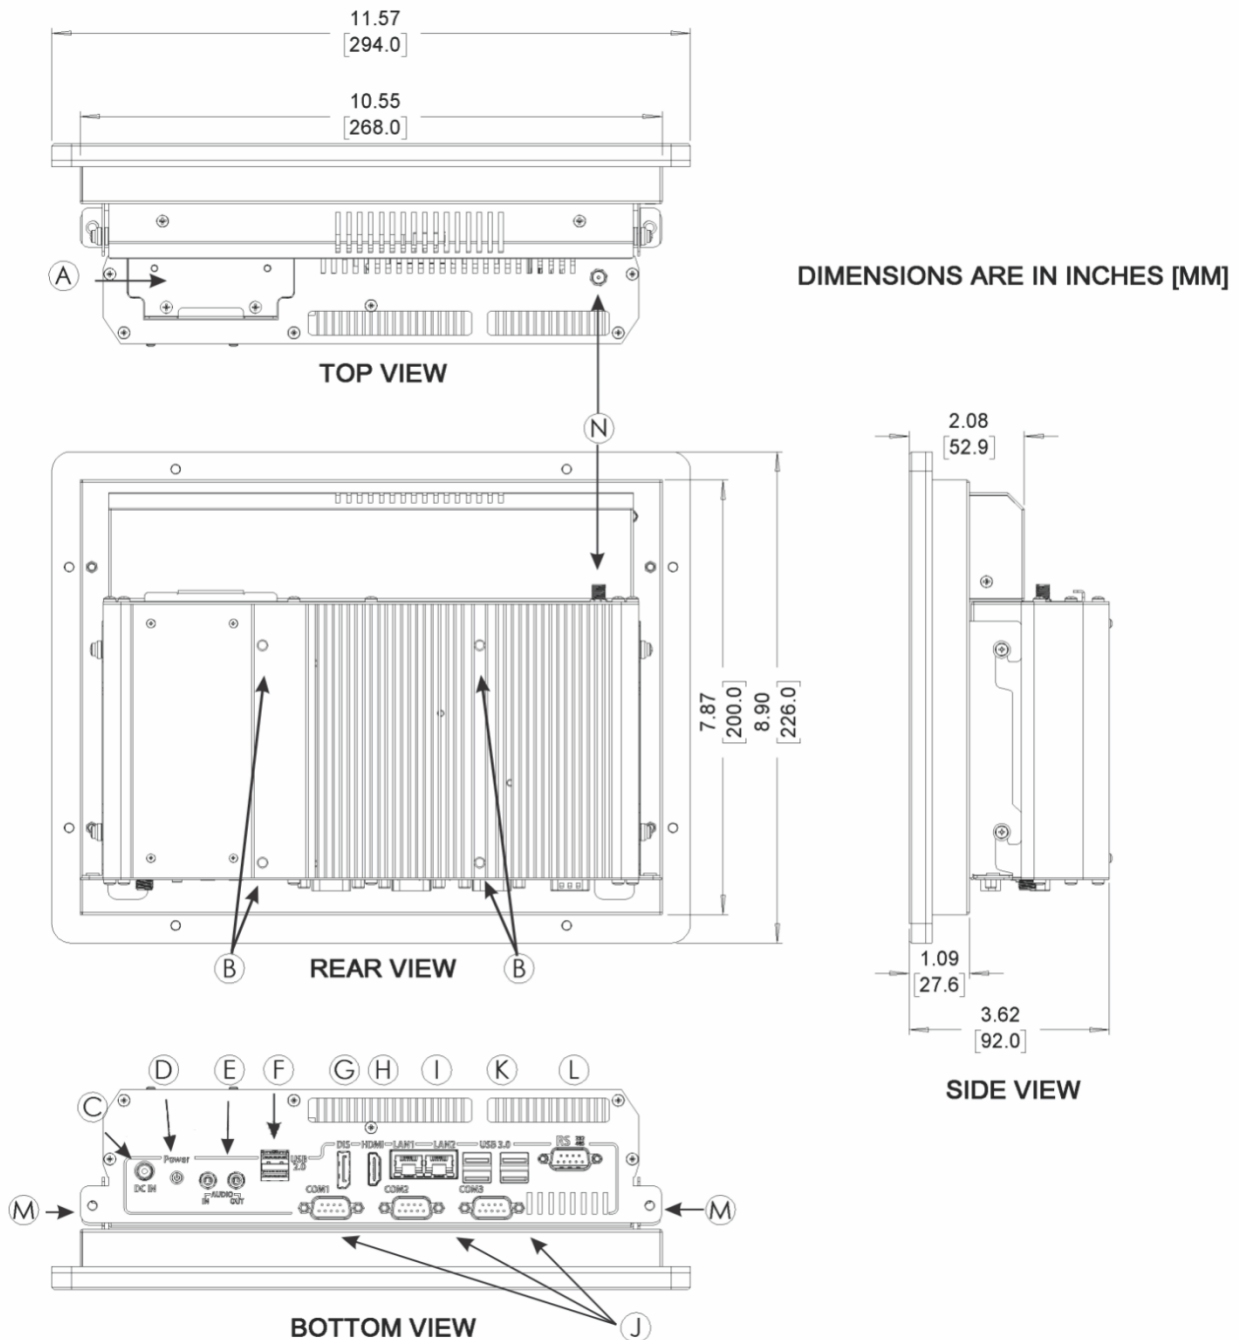


- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> HDMI® Output   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> COM Ports DE9P (RS232)   |
| <b>D</b> Illuminated Power Button              | <b>K</b> USB 3.0 Host Ports   |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Thumb-Screw Mounting   |
| <b>G</b> DisplayPort Output                    | <b>N</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |

**PC1312 DIMENSIONS**

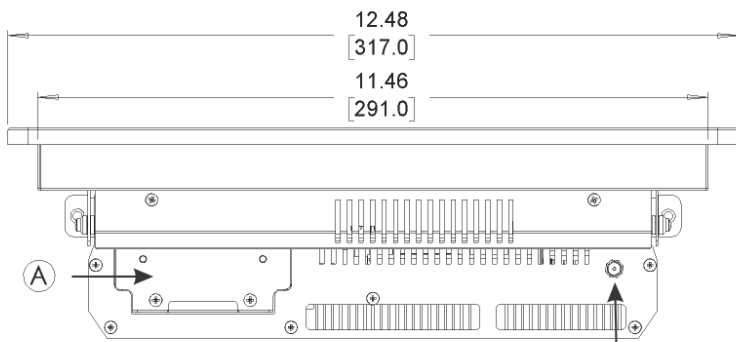


**TOP VIEW**


**DIMENSIONS ARE IN INCHES [MM]**

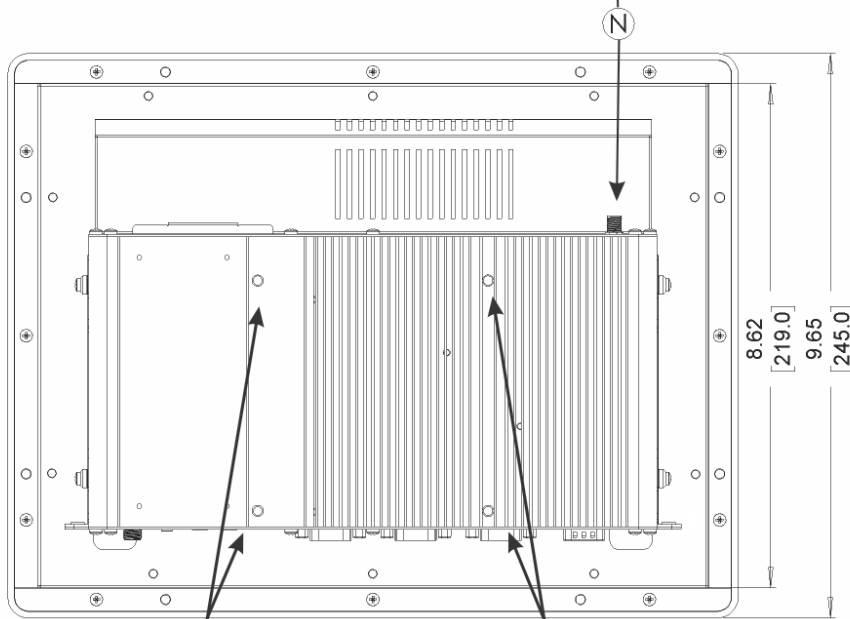

**REAR VIEW**

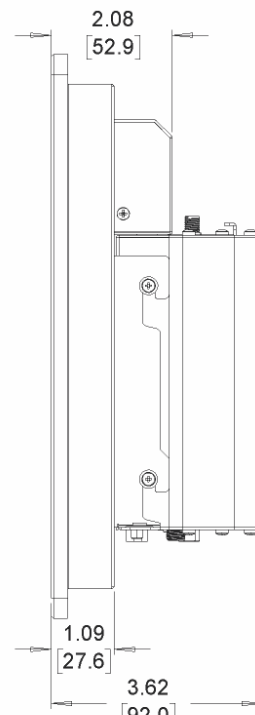


**SIDE VIEW**

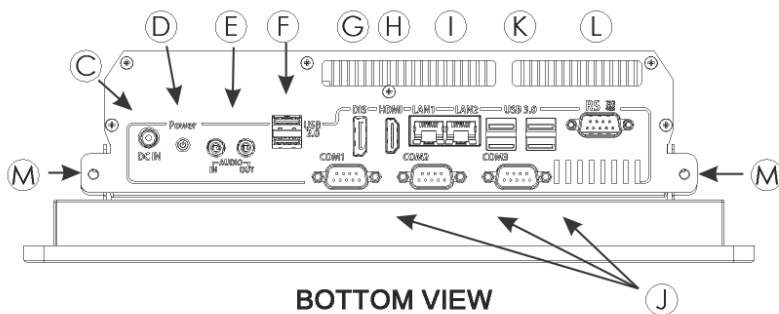

**BOTTOM VIEW**

- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> HDMI® Output   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> COM Ports DE9P (RS232)   |
| <b>D</b> Illuminated Power Button              | <b>K</b> USB 3.0 Host Ports   |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Thumb-Screw Mounting   |
| <b>G</b> DisplayPort Output                    | <b>N</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |


**PC1315 DIMENSIONS**

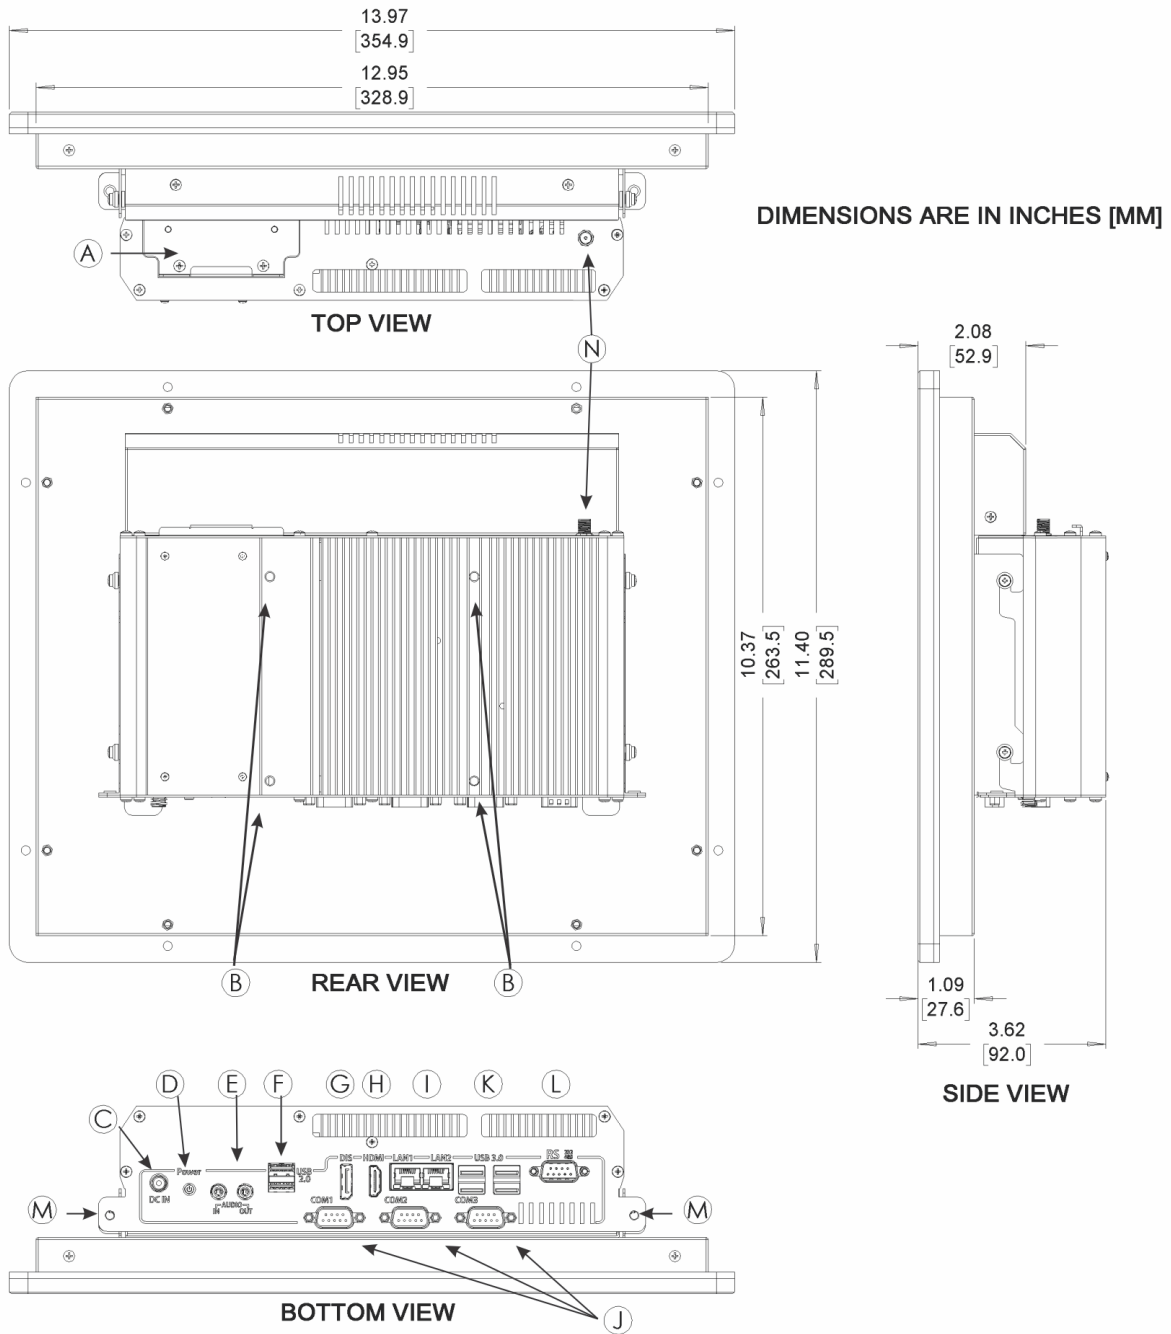

- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> HDMI® Output   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> COM Ports DE9P (RS232)   |
| <b>D</b> Illuminated Power Button              | <b>K</b> USB 3.0 Host Ports   |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Thumb-Screw Mounting   |
| <b>G</b> DisplayPort Output                    | <b>N</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |




**PC1316 DIMENSIONS**

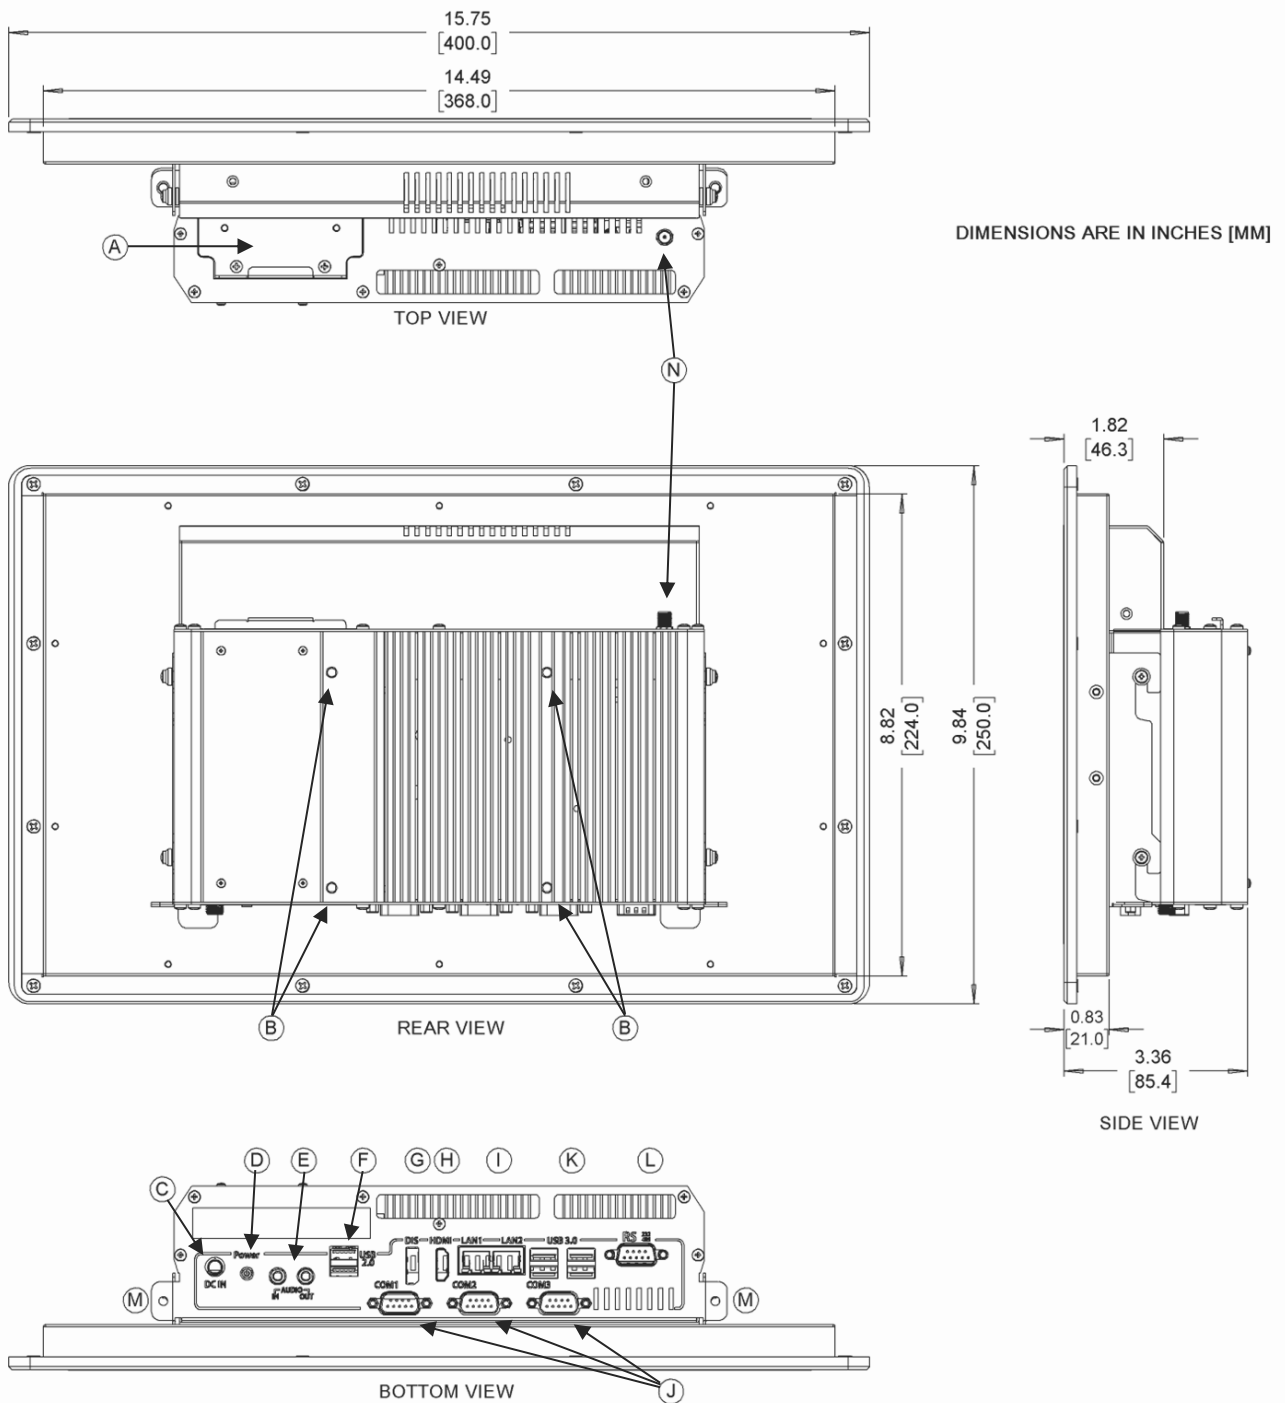


- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> HDMI® Output   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> COM Ports DE9P (RS232)   |
| <b>D</b> Illuminated Power Button              | <b>K</b> USB 3.0 Host Ports   |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Thumb-Screw Mounting   |
| <b>G</b> DisplayPort Output                    | <b>N</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |

**PC1317 DIMENSIONS**

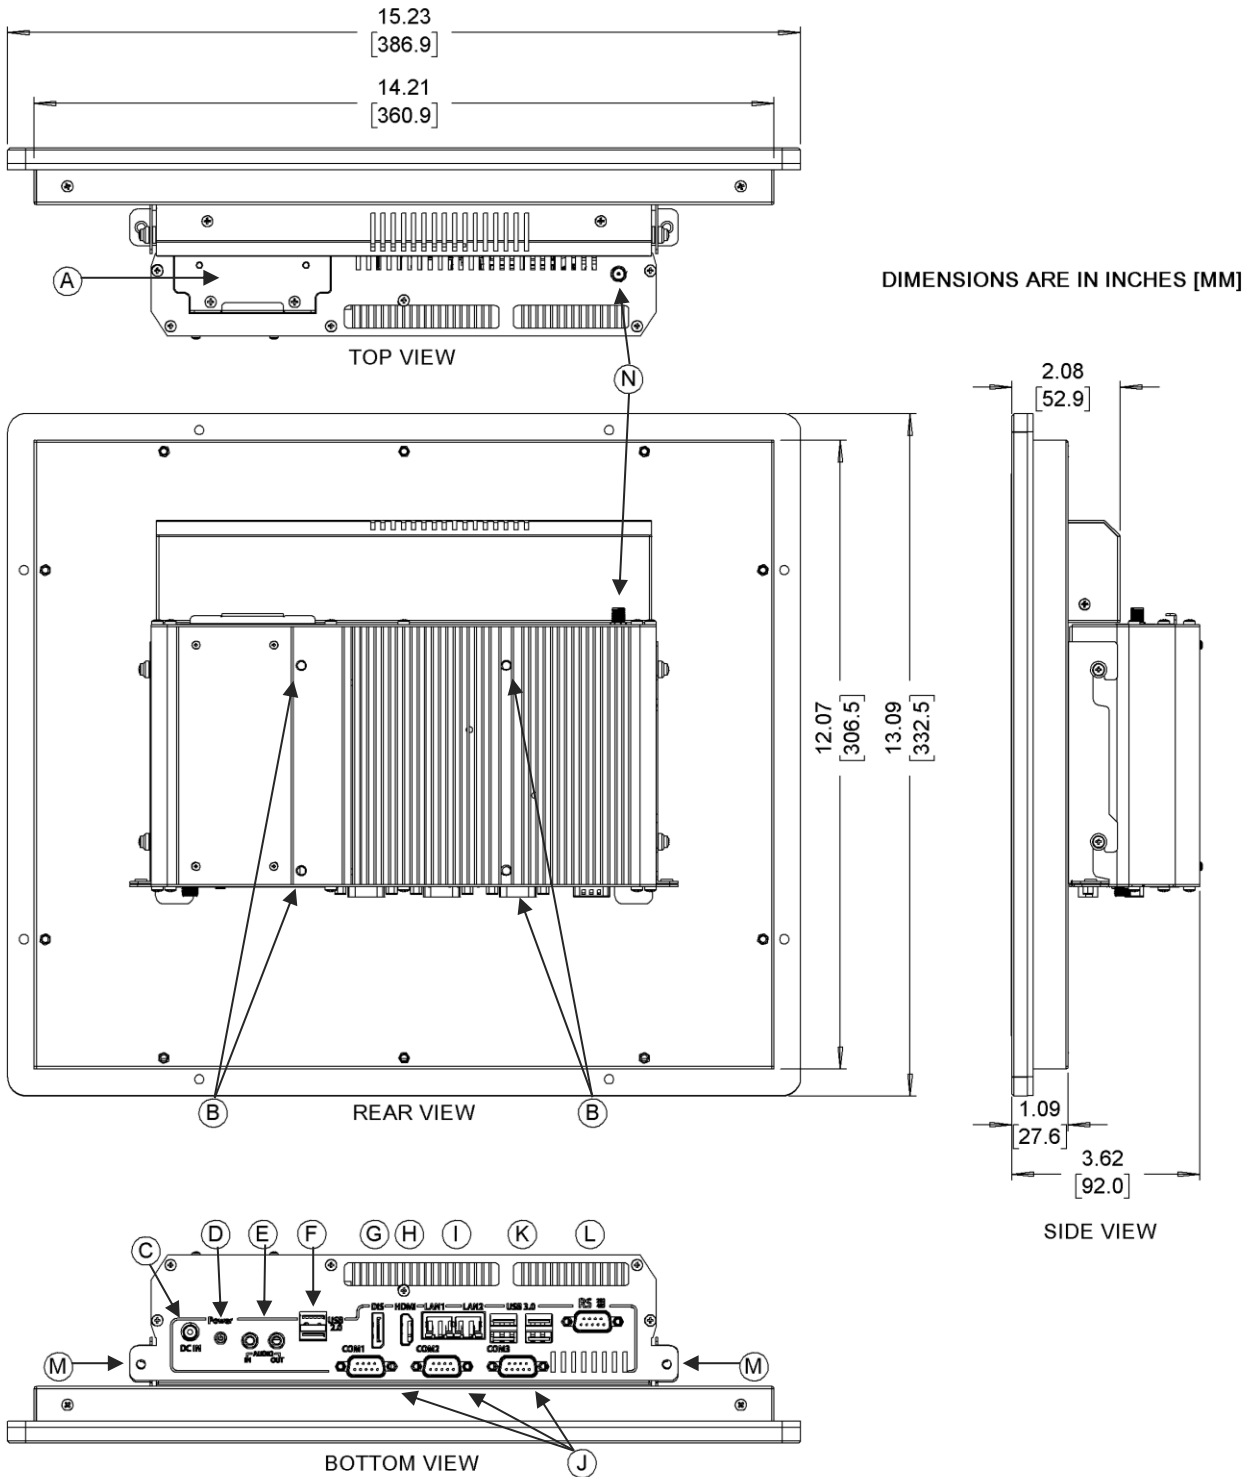


- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> HDMI® Output   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> COM Ports DE9P (RS232)   |
| <b>D</b> Illuminated Power Button              | <b>K</b> USB 3.0 Host Ports   |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Thumb-Screw Mounting   |
| <b>G</b> DisplayPort Output                    | <b>N</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |

**PC1319 DIMENSIONS**

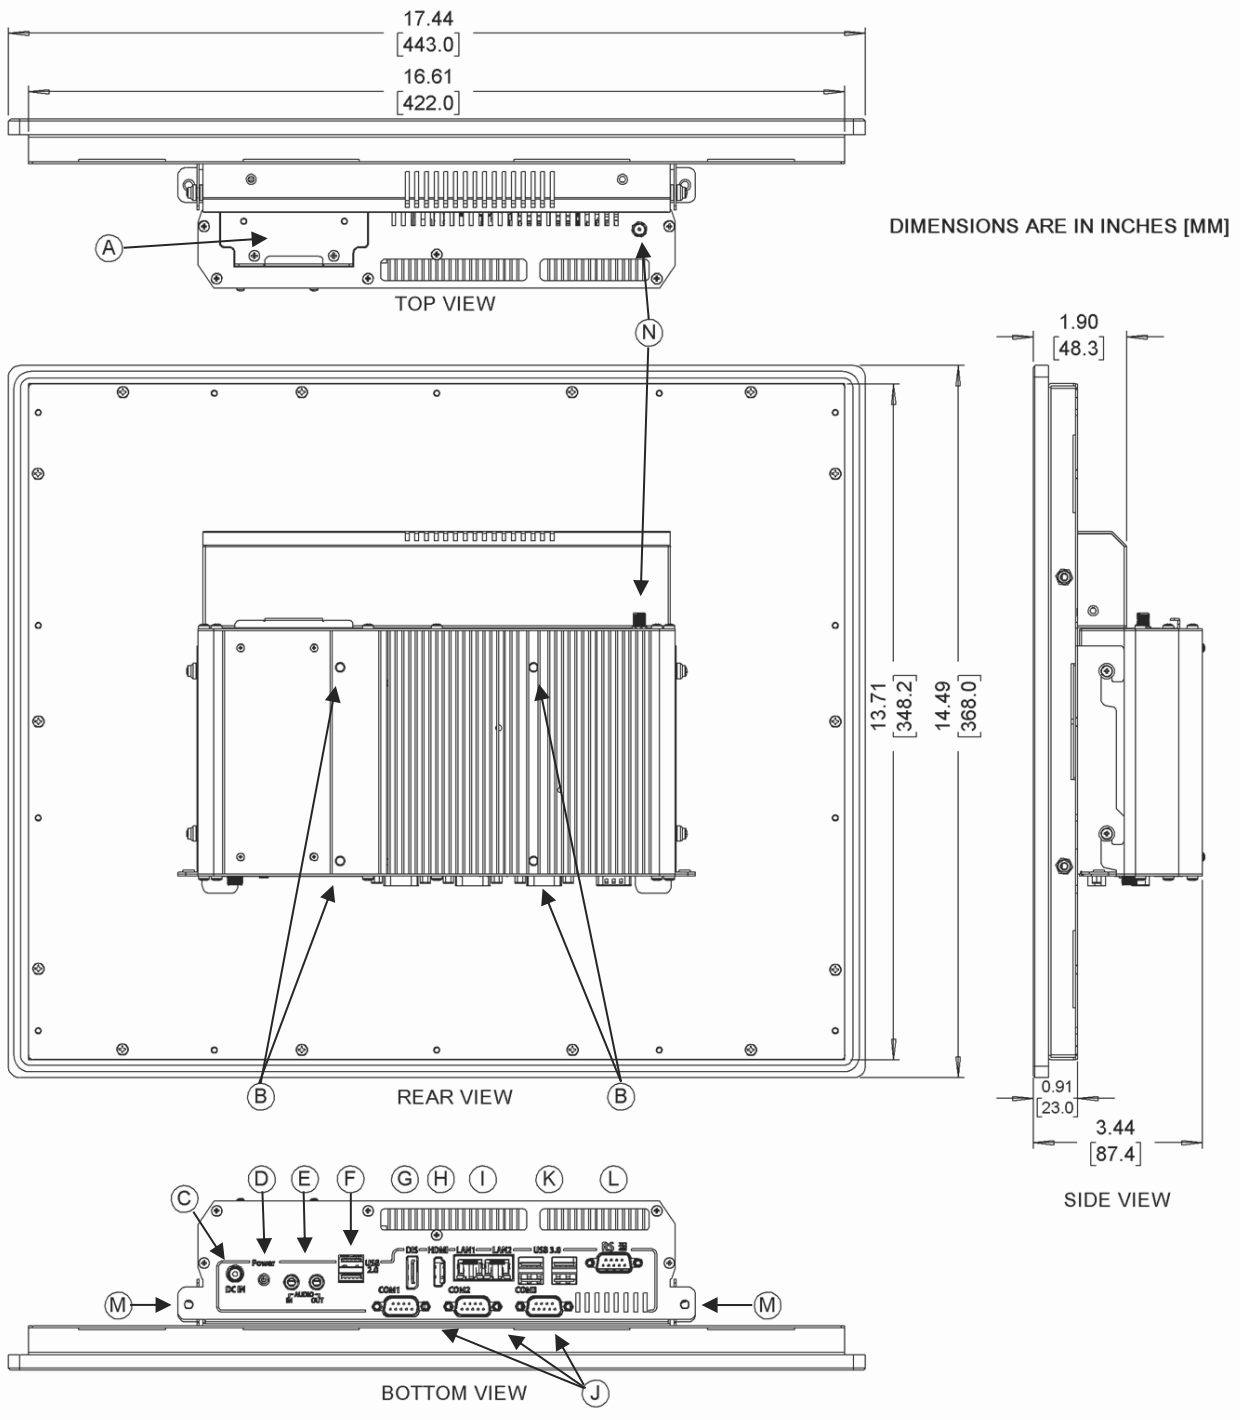

- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> HDMI® Output   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> COM Ports DE9P (RS232)   |
| <b>D</b> Illuminated Power Button              | <b>K</b> USB 3.0 Host Ports   |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Thumb-Screw Mounting   |
| <b>G</b> DisplayPort Output                    | <b>N</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |

**PC1321 DIMENSIONS**

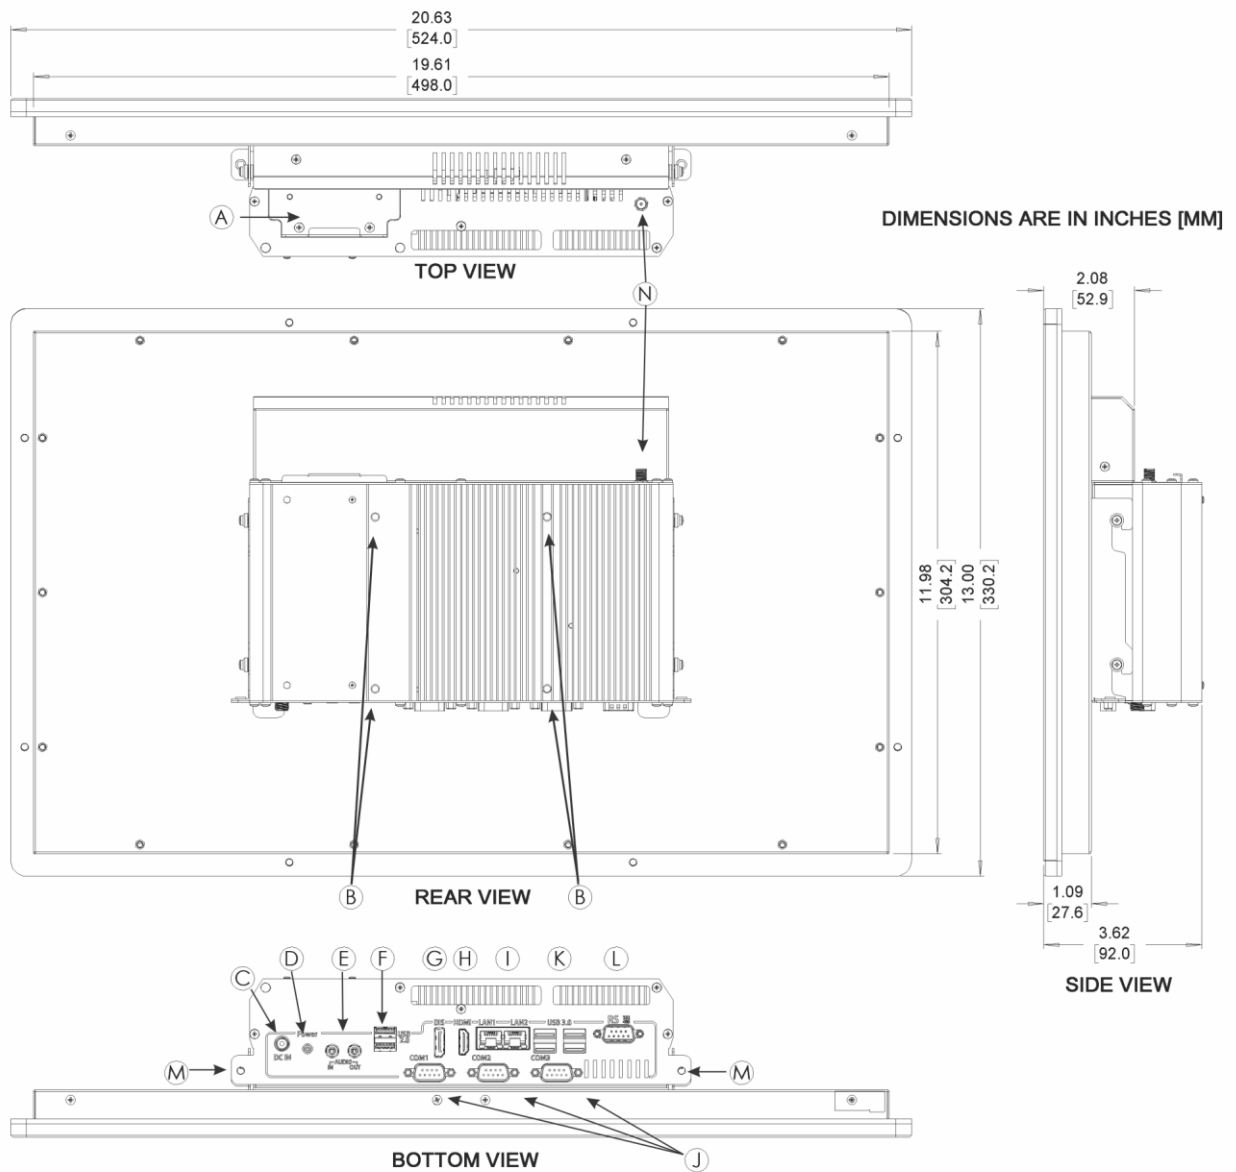


- |  |   |
|--|---|
| <b>A</b> Solid State Drive Bay                 | <b>H</b> HDMI® Output   |
| <b>B</b> VESA 100 x 100 mounting               | <b>I</b> Gigabit Ethernet Ports   |
| <b>C</b> DC Input Power Connector              | <b>J</b> COM Ports DE9P (RS232)   |
| <b>D</b> Illuminated Power Button              | <b>K</b> USB 3.0 Host Ports   |
| <b>E</b> 3.5mm Audio Ports (Mic-In / Line Out) | <b>L</b> COM Port DE9P (RS232/RS422/RS485 Configurable)                           |
| <b>F</b> USB 2.0 Host Ports                    | <b>M</b> Thumb-Screw Mounting   |
| <b>G</b> DisplayPort Output                    | <b>N</b> Wi-Fi Antenna Connector<br>(Nonfunctional unless Wi-Fi Option Purchased) |

## I/O PORTS

### HDMI®


Connector Type: High Definition Multimedia Interface® Socket



### DISPLAYPORT


DisplayPort Connector available on PC1300 Series models

Connector Type: DisplayPort Interface Connector Socket



### USB 3.0


All PC1000 Series models have 4 x USB 3.0 Type A Host Ports



**Note:** USB 3.0 allows data transfers up to 5Gb/s, full-speed, and low-speed signaling. The total current output limit is 1.8A per Stacked Hub (**0.9A per individual port**)

### USB 2.0


All PC1000 Series models have 2 x USB 2.0 Type A Host Ports



**Note:** USB 2.0 allows data transfers up to 480Mb/s, full-speed, and low-speed signaling. The total current output limit is 1.0A per Stacked Hub (**0.5A per individual port**)

## LAN1 AND LAN2

Connector Type: Standard 10/100/1000M RJ-45 Ethernet ports

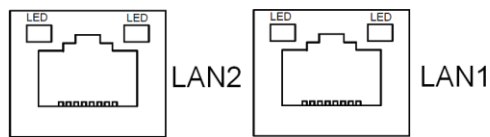

## AUDIO-OUT

Connector Type: 3.5mm audio jack output



## AUDIO-IN


Connector Type: 3.5mm audio jack input



## COM1-COM4:

(COM4 only on PC1300 Series)

Connector Type: DE9P Male Serial Ports



Pin #	COM1*			COM2	COM3	COM4**
	(RS-232 Default)	(RS422)	(RS485)	(RS232)	(RS232)	(RS232)
1	DCD	422_TX-	485-	DCD	DCD	DCD
2	RXD	422_TX+	485+	RXD	RXD	RXD
3	TXD	422_RX+	NC	TXD	TXD	TXD
4	DTR	422_RX-	NC	DTR	DTR	DTR
5	GND	GND	GND	GND	GND	GND
6	DSR	NC	NC	DSR	DSR	DSR
7	RTS	NC	NC	RTS	RTS	RTS
8	CTS	NC	NC	CTS	CTS	CTS
9	RI	NC	NC	RI	RI	RI

* Refer to “Setting COM1 Function” to set the communication mode.		** COM4 only on PC1300 Series
---	--	-------------------------------

## BIOS CONFIGURATION OPTIONS

The BIOS (Basic Input/Output System) installed in the ROM of your Panel PC supports Intel® processors. The BIOS provides critical low-level support for standard devices such as disk drives and serial ports. The BIOS also provides a Setup utility program that allows the user to specify system configuration and setting options.



**Warning:** *Changing settings or configurations within the BIOS of your Panel PC can adversely impact the operation of your Panel PC if incorrectly performed.*

*Maple Systems provides the below instructions solely for the operations specified, and is not responsible for improper unit operation caused by changing settings or entries other than those explicitly listed below.*

To enter the BIOS of your Panel PC, ensure a USB keyboard is connected to your PC and apply power. Your PC1200 Series is automatically configured to boot up when power is applied. Turn the PC1300 Series on by pressing the power button located on the bottom of the CPU Module. If you wish for the PC1300 Series to automatically boot, see the instructions below.

Press the <Delete> key immediately during the POST (Power On Self-Test) portion of your PC’s bootup sequence to enter the BIOS. The Main Menu containing the system summary information will appear.




*Example of initial POST screen. Your PC's POST screen may appear different.*

## SETTING COM1 FUNCTION


The PC1000 COM1 Serial Port is configured by default as RS232, but can be configured for RS422 (4-wire) or RS485 (2-wire) operation if so desired. COM1 port configuration is managed through the BIOS; see below for instructions on changing COM1 port mode.

**Note:** COM1 is the only port that can be configured for RS422 or RS485 operation; all other Serial Ports are exclusively configured for RS232 operation.


1. At the BIOS Main Menu, press the right arrow key for the **Advanced** submenu.
2. Select the **F81846 Super IO Configuration** menu and press the **Enter** key.

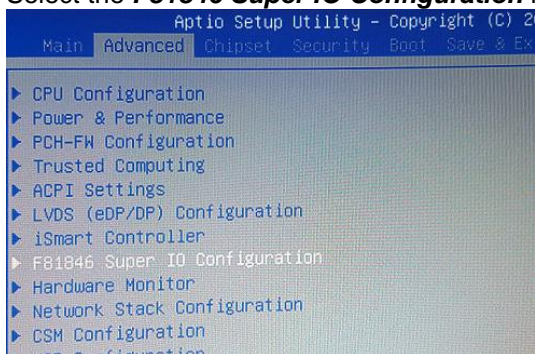


3. Select the **Serial Port 1 Configuration** menu option and press the **Enter** key.

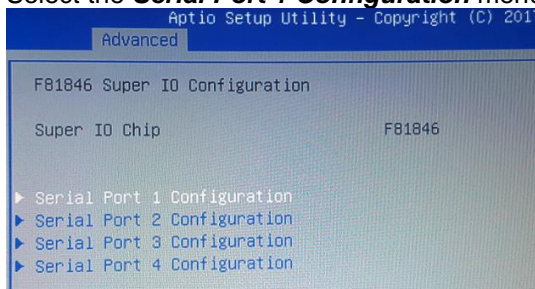


4. Select the **F81846 Serial Port 1 Mode Select** menu option and press the **Enter** key.

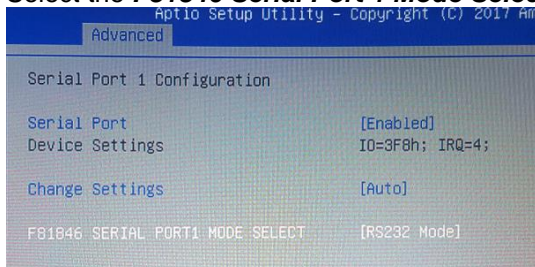

5. Select the **[RS232], [RS485], or [RS422]** option, depending on your desired port configuration and press the **Enter** key.

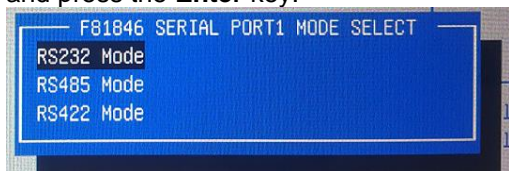

6. Press the F4 key to save and exit.

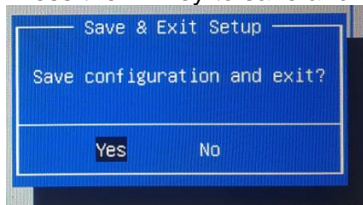


**Note:** Make sure to SAVE changes before exiting the BIOS. The F4 key will bring up the save option.




## AUTOMATICALLY STARTUP WHEN POWER IS APPLIED (PC1300 SERIES)

When a Panel PC unit is panel-mounted, the power button becomes inaccessible. There is an option in the PC1300 Series BIOS that allows for the unit to be powered up when DC power is applied.


1. At the BIOS main menu, press the right arrow key for the **Advanced** submenu.
2. Select the **iSmart Controller** menu and press the **Enter** key.

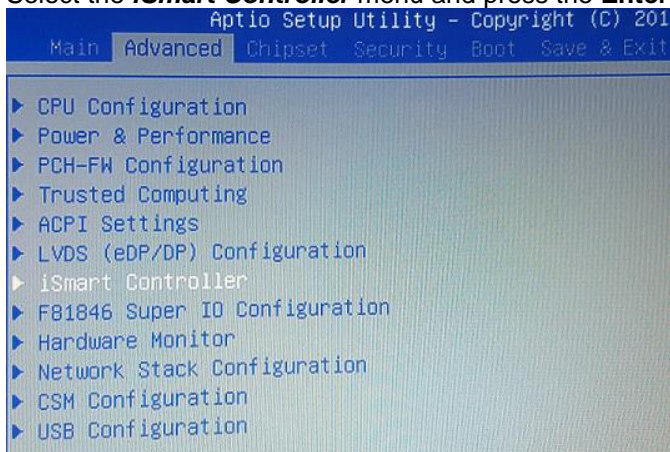


3. Select the **Power-On After Power failure** menu option and press the **Enter** key.

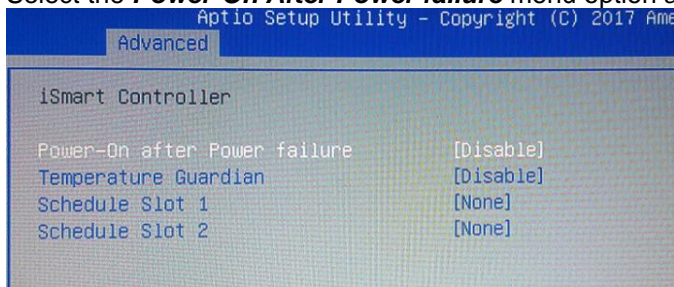

4. Select **[ENABLED]** with the arrow keys and press the **Enter** key.

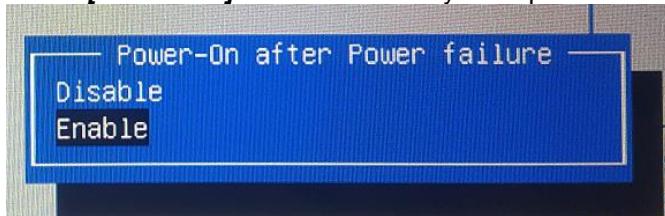

5. Press the F4 key to save and exit.

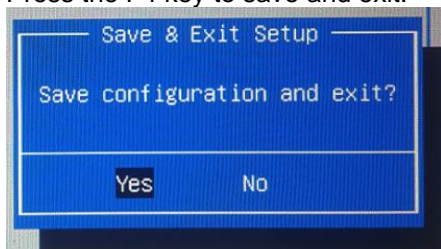

**Note:** Make sure to **SAVE** changes before exiting the BIOS. The F4 key will bring up the save option.

## OPERATING SYSTEM OPTIONS

The PC1000 Series Panel PCs can be purchased with the following operating systems pre-installed:

- Windows 10 IoT Enterprise LTSC
- Windows 10 IoT Enterprise Embedded LTSC
- Windows 11 IoT Enterprise GAC (*PC1300 Series*)
- Windows 11 IoT Enterprise Embedded GAC (*PC1300 Series*)
- Windows 11 Professional (*PC1300 Series*)

### WINDOWS 10 IoT ENTERPRISE LTSC / WINDOWS 11 IoT ENTERPRISE GAC (PC1300 Series)

Windows IoT Enterprise is a full enterprise version of Windows 10 / Windows 11 available on all Industrial Box PC models. This powerful operating system delivers enterprise manageability and security to IoT solutions. Additionally, all of the features and functionality that customers expect to find on their desktop PC are available in this version. The Long Term Servicing Channel (LTSC – Windows 10) or General Availability Channel (GAC – Windows 11) version ensures long term stability that critical production systems require by updating only necessary operating system components, with significantly fewer update interruptions.

#### Included Apps with all Windows OS options:

- Microsoft Edge Web Browser
- LibreOffice Suite (Compatible with the following document types:)
  - MS Word
  - MS Excel
  - MS PowerPoint
  - Adobe PDF
- Media Player

### WINDOWS 11 PROFESSIONAL (PC1300 Series)

Windows 11 Professional is a full professional version of Windows. All the features and functionality that customers expect to find on their desktop PC are available in this version. This powerful operating system lifetime security updates for the duration of Microsoft's support timeline of the OS. These versions are operationally identical to the Consumer operating System versions of Windows, and as such they provide regular feature and functionality updates on a more frequent schedule than Enterprise editions of the same OS.

## WONDERWARE / AVEVA™ EDGE

All of the PC1000 Series PCs are compatible with Wonderware / AVEVA™ Edge SCADA Software package. The choice of operating system will determine the target platform and runtime license required as shown in the chart below:

Operating System	Runtime License*	Target Platform
Windows 10 IoT Enterprise	...for Embedded view..for windows Embedded	Windows

\* There are multiple options for each operating system indicated by “...” in the chart above. Refer to the *AVEVA™ Edge price list* for details.

For Windows 10 IoT Enterprise LTSC, install the Embedded View runtime by copying CEServer.exe from your C:\Program Files (x86)\InduSoft Web Studio v8.1\Redist\WinEmbedded\Bin to the PC system files.

Your Industrial Control Solutions Source

---

[www.maplesystems.com](http://www.maplesystems.com)



1010-1080 rev 07

Maple Systems, Inc. | 808 134<sup>th</sup> St. SW, Suite 120, Everett, WA 98204 | 425.745.3229