





cMT Communication Gateway



- 32-bit RISC Cortex-A8, 600MHz CPU
- 2 Ethernet Ports
- 256 MB Flash, 256 MB RAM Memory
- Compact Design, 35mm DIN Rail Mount
- MQTT, OPC-UA, MODBUS TCP/IP Gateway Support

System	CPU	32-bit RISC Cortex-A8, 600 MHz
	Memory (RAM)	256 MB
	Memory (Flash)	256 MB
	RTC	Built-in
I/O Ports	Serial	1 x DE9P COM1: RS-232, COM2: RS-485 2 or 4 wire, COM3: RS-485 2 wire
	LAN	1 x 10/100 Base-T RJ-45, 1 x GbE RJ-45
	CANbus	N/A
	USB Host	N/A
	USB Client	N/A
	Audio	N/A
	Video	N/A
	Wi-Fi	N/A
	HDMI®	N/A
	SD Card Slot	N/A
	Display	Display Type
Size (W x H)		N/A
Max. Resolution		N/A
Max. Color		N/A
Luminance (cd/m ²)		N/A
View Angle (H°/V°)		N/A
Contrast Ratio		N/A
Backlight Lifetime (Hours)		N/A
Touch Screen	Type	N/A
	Active Area Accuracy	N/A
Electrical	Input Voltage	24 ± 20% VDC
	Input Current	230 mA @ 24 VDC
	Input Power	5.52 W
	Power Isolation	Built-in
	Isolation Resistance	Exceed 50 MΩ at 500 VDC
Mechanical	Enclosure	Plastic, charcoal grey
	PCB Coating	Yes
	Dimensions (W x H x D)	4.29 x 3.19 x 1.06 inches [109 x 81 x 27 mm]
	Net Weight	Approx. 0.31 lbs. [0.14 kg]
	Mounting	35 mm DIN rail
Environmental	Operating Temperature	32° ~ 122°F (0° ~ 50°C)
	Storage Temperature	-4° ~ 140°F (-20° ~ 60°C)
	Relative Humidity	10% ~ 90% (non-condensing)
	Vibration Endurance	10 to 25 Hz (X, Y, Z direction, 2G, 30 minutes)
	Rating	IP20
	Certifications	cULus, CE, RoHS
Software	EasyBuilderPro (all versions) EZwarePlus (v5.07.01 or later)	
Notes		

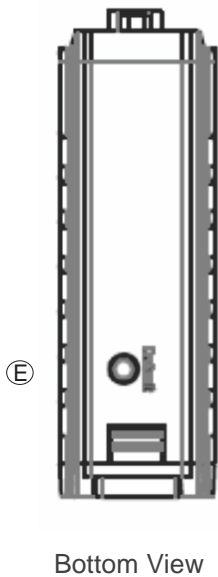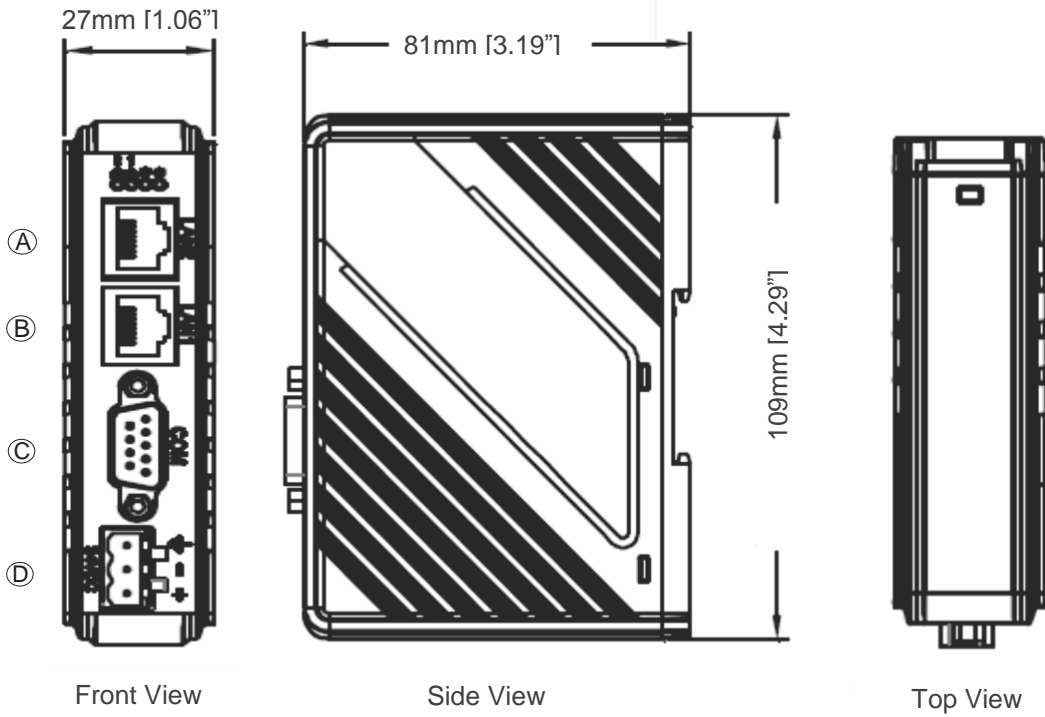

- A Ethernet Port
- B Gigabit Ethernet Port
- C COM Port DE9P
- D Power Connector
- E Factory Default Button