

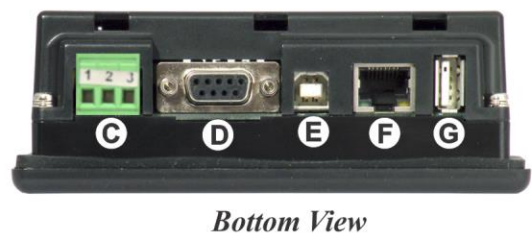
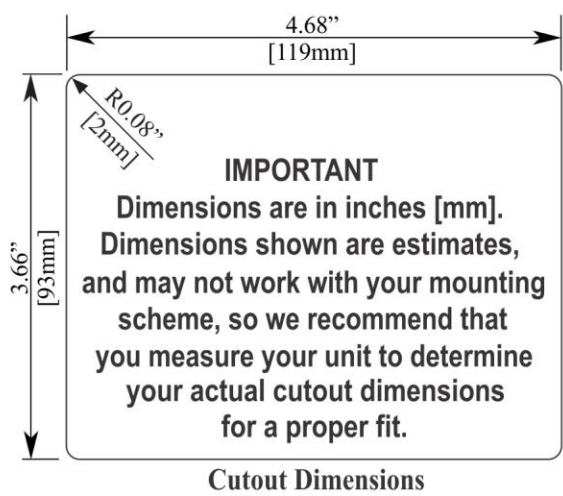
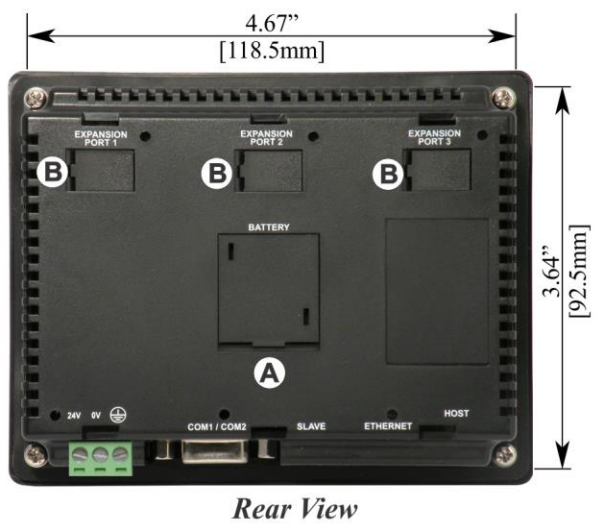


4.3" Touchscreen HMI + PLC

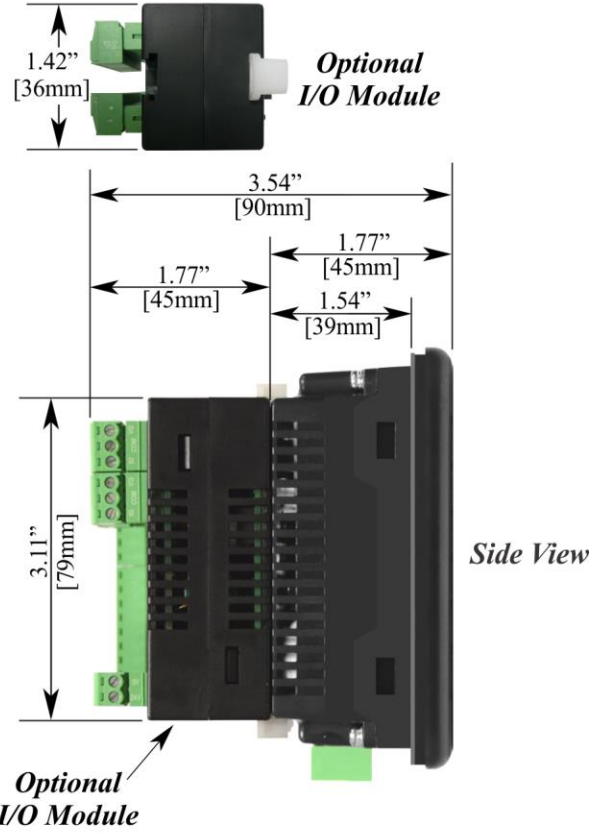

- Touchscreen
- 480 x 272 Pixel Resolution TFT
- Ethernet
- 3 I/O Expansion Ports
- 2 Serial Ports

System	CPU	32-bit RISC, 400 MHz
	Memory	128 MB total
	Application Memory	45 MB screen / 20 MB logging
I/O Ports	USB	1 host port, 1 slave port
	Serial Ports	COM1: RS-232 COM2: RS-485, 2 wire and 4 wire
	Ethernet Port	10/100 Base-T (RS45)
	Expansion Ports	3 (for optional I/O modules)
	RTC	Built-in
	Display	Display Type
Size (W x H)		3.8" x 2.2" [96 x 55 mm]
Max. Resolution (pixels)		480 x 272
Max. Colors		32 K
Contrast Ratio		500:1
Backlight		LED
Backlight Longevity		30,000 hours at 25° C
Brightness (cd/ m ²)		400
Touchscreen / Keypad	Type	4 wire analog resistive
	Lifespan	1 million activations minimum
	Resolution	Continuous
Mechanical	Enclosure	Plastic molding
	Ratings	IP66
	Mounting	Panel
	Dimensions (W x H x D)	5.04" x 4.33" x 1.77" [128 x 110 x 45 mm]
	Panel Cutout (W x H)	4.70" x 3.68" [119.5 x 93.5 mm]
	Net Weight	0.73 lbs (.33 Kg)
	Power Requirements	24 VDC, 250 mA
Environmental	Operating Temperature	32 ~ 122°F (0~50° C)
	Storage Temperature	-4 ~ 176°F (-20 ~ 80° C)
	Relative Humidity	10 ~ 85% (non-condensing)
	Shock (operation)	25 g acceleration for 11 ms
	Certifications	CE, cULus (Class I, Div 2 rated), RoHS
Notes	This unit is compatible with all HMC7 I/O modules. Specifications subject to change without notice.	

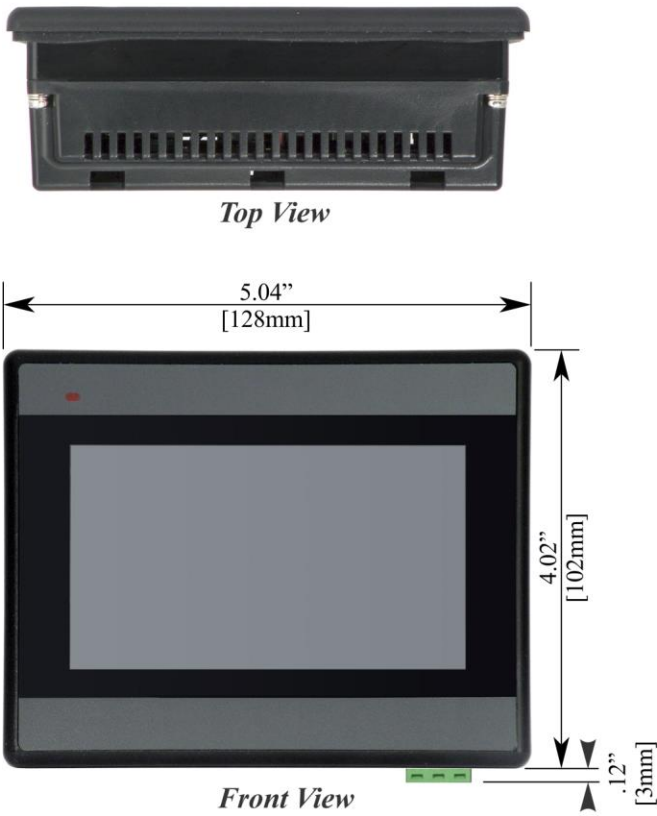

Dimensions are in inches [mm]

- | | | | |
|------------------------------|------------------------------|-------------------------|------------------------|
| A Battery Compartment | C Power Connector | E USB Slave Port | G USB Host Port |
| B Expansion Ports 1-3 | D DE9S Com Port 1 & 2 | F Ethernet Port | |