

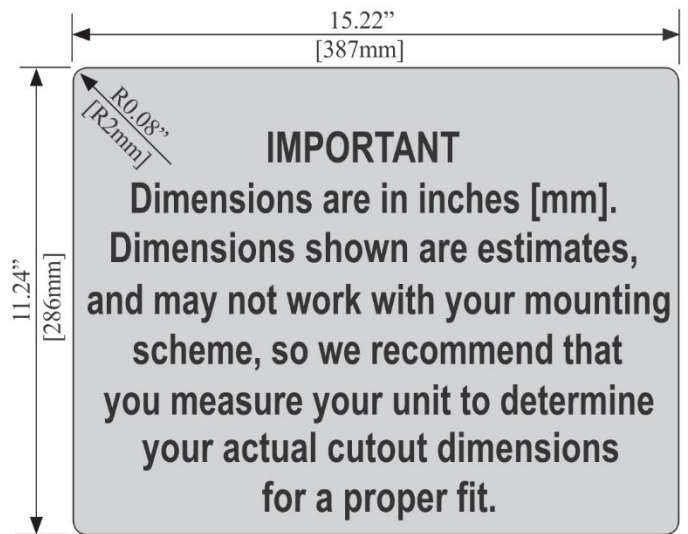
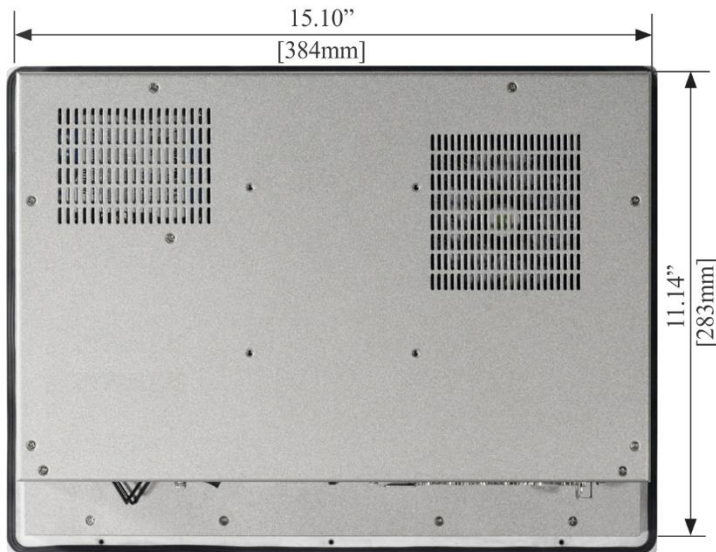


15" Heavy Industrial Panel PC

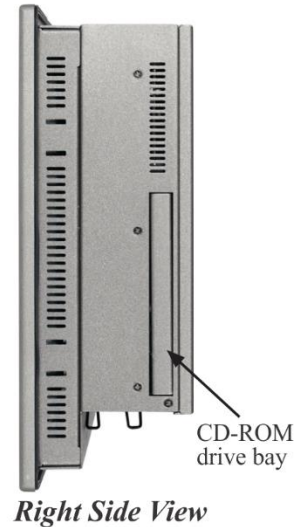


- Intel Pentium® and Core™ i3 processor
- Robust aluminum front bezel and steel housing
- IP66 front panel design
- 2 GbE ports, 5 serial ports, 4 USB 2.0 ports, 2 USB 3.0 ports

System	CPU	Base Model: Intel® Pentium® G630T dual-core processor Upgrade Options: Intel® Core™ i3 2120T dual-core processor
	System Chipset	Intel H61
	System Memory	4GB DDR3 SO-DIMM
I/O Ports	USB	4 x USB 2.0 type A 2 x USB 3.0 type A
	Serial	4 x DE9P COM1-4: RS-232 1 x DE9P COM5: RS-232/422/485 (RS232 Default)
	LPT	N/A
	Audio	1 x 3.5 mm line out 1 x 3.5 mm mic in
	Fiber LAN	2 x SFP
	VGA	1 x DE15S video output
	LAN	2 x RJ-45 GbE
	Power	1 x C14 connector, AC power input
Storage Space	HDD	1 x 2.5" SATA 2, 320 GB
	CFast Card Slot	Yes
Expansion	Expansion Slot	Optional 1 x PCI or PCIe (10W max)
	Optical Disc Drive	Optional slim CD/DVD-RW
Display	Display Type	15" TFT-LCD
	Max. Resolution	1024 x 768
	Max. Color	16.2M
	Luminance (cd/m ²)	450
	View Angle (H°/V°)	160/150
	Contrast Ratio	800:1
Touch Screen	Backlight Lifetime (hours)	50,000 hours
	Type	5-wire resistive touch
	Interface	RS-232
Electrical	Light Transmission	80% ± 5%
	Input Voltage	100~240 VAC
Mechanical	Input Power	220 W
	Construction	Aluminum front bezel and chassis
	Rating	IP66 front panel/NEMA4X
	Mounting	Panel mounting, VESA 100 x 100
	Dimension	16.14 x 12.17 x 4.35 inches [410 x 309 x 111 mm]
Environmental	Net Weight	24 lbs. [11 kg]
	Operating Temperature	32~113°F [0~45°C]
	Storage Temperature	-4~158°F [-20~60°C]
	Storage Humidity	10 to 90%
Operating System	Certification	CE / FCC Class A / RoHS
	Type	Microsoft Windows® 7 Pro for Embedded 32-bit
Notes	Specifications subject to change without notice.	

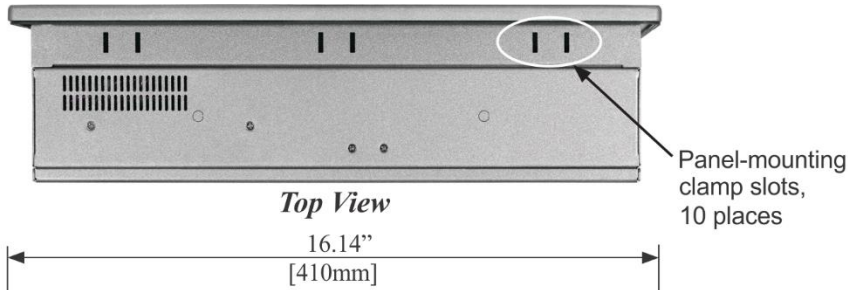

Cutout Dimensions

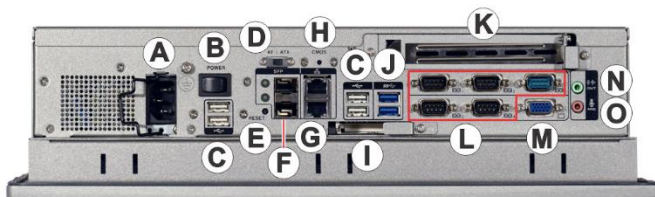

Dimensions are in inches [mm]

- | | | | | |
|--------------------|-----------------|---------------------|--------------------|------------|
| A AC Input | D AT/ATX Switch | G 2x Ethernet Ports | J 2x USB 3.0 Ports | M VGA |
| B Power Switch | E Reset Button | H Clear CMOS | K Expansion port | N Line-out |
| C 4x USB 2.0 Ports | F 2x SFP Ports | I Compact Flash | L 5x COM Ports 1-5 | O Mic-In |