


15" Fanless Panel PC with Intel Atom® N2600 Processor




- Choose Microsoft Windows® OS
- Memory and Wi-Fi Kit upgrades available
- Aluminum Enclosure
- Panel or VESA mount
- Integrate with Indusoft's Web Studio®

System	CPU	Intel Atom Cedar View N2600 1.6 GHz Dual Core processor
	System Chipset	Intel NM10
	System Memory	Onboard DDR3 2 GB 800 MHz
I/O Ports	USB	USB 2.0 type A x 2
	Serial	COM1: RS-232/422/485 DE-9P (default RS-232) COM2: RS-232 DE-9P
	Audio	1 x 3.5mm line out
	LAN	GbE RJ-45 x 2
	Power	3 pins terminal block connector, DC power input
	Storage	Solid State Drive Options 1 x 2.5" SATA 2, MLC (32, 64, 128, 256 GB SSD)
	Expansion	SD Card Slot 1 x internal secure digital memory card socket, up to 32 GB
Display	Expansion Slot	N/A
	Display Type	15" TFT-LCD
	Max. Resolution	1024 x 768
	Max. Color	16.2M
	Luminance (cd/m²)	350
	View Angle (H°/V°)	160/145
	Contrast Ratio	800:1
Touch Screen	Backlight Lifetime (hours)	50,000+
	Type	Resistive touch
	Interface	RS-232
Electrical	Light Transmission	80%
	Input Voltage	9~36 VDC
	Input Current	0.7 ~ 2.6 A
Mechanical	Input Power	25.6 W
	Construction	Silver aluminum front bezel and chassis
	Rating	IP65 front panel / NEMA 4 when panel mounted
	Mounting	Panel mounting, VESA 100 x 100
	Dimension (W x H x D)	16.14 x 12.20 x 2.15 inches [410 x 310 x 54.67mm]
Environmental	Net Weight	9.7 lbs [4.4kg]
	Operating Temperature	32~122°F [0~50°C]
	Storage Temperature	-4~140°F [-20~60°C]
	Storage Humidity	10 to 90% @ 40°C, non-condensing
Operating System	Certification	CE / FCC Class A / cULus / RoHS
	Type	Base Model: Microsoft Windows® Embedded Standard 7 32-bit (WS7P) Upgrade Option: Microsoft Windows® 7 Pro for Embedded 32-bit (FES 7 Pro)
Notes	Specifications subject to change without notice.	


Top View




Front View

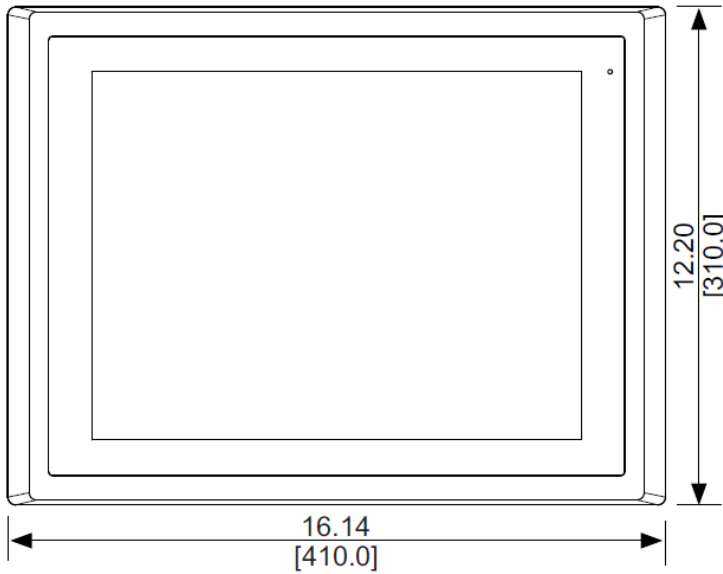


Side View

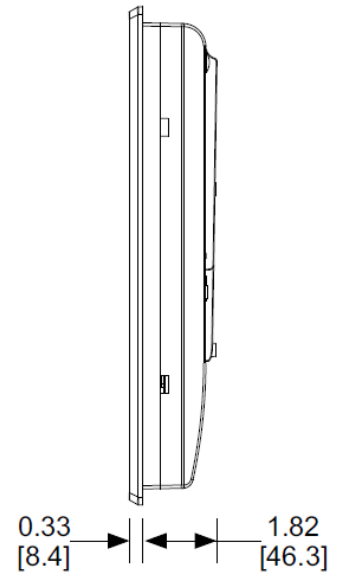


Rear View

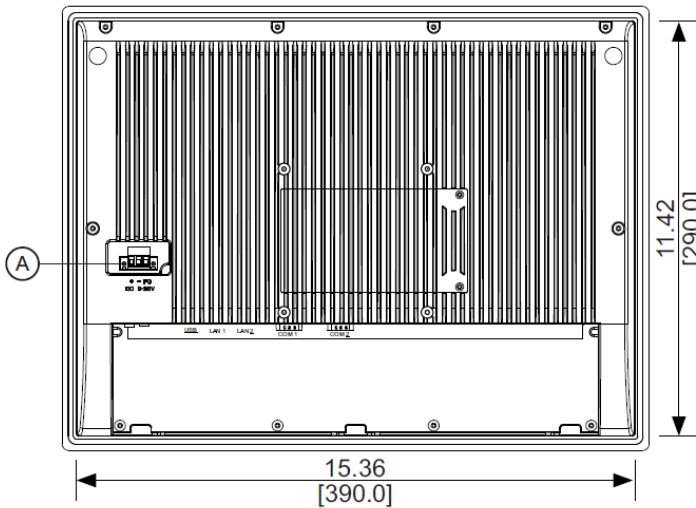

Cutout Dimensions

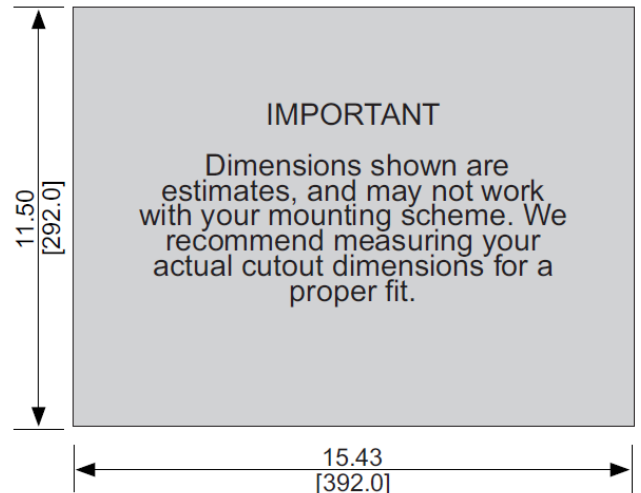

Bottom View

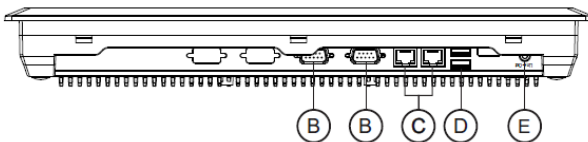

Dimensions are in inches [mm]

- (A) Power Connector
- (B) Com Port DE9P
- (C) Ethernet Ports
- (D) USB 2.0 Ports
- (E) Line out